


PS 1100, PS 1116, PS 1117 – Standard Pipe Clamp (GRC, IMC and SCH 40/SCH 80 steel pipe)

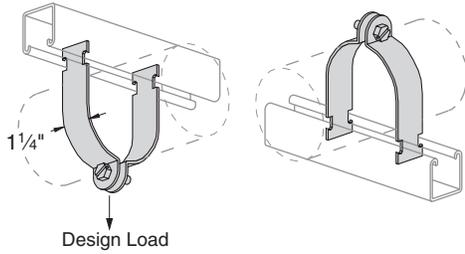

Material and finish are specified as:

- 1100 AL** Alum. clamp, EG fasteners
- 1100 HG** Clamp, Stainless Steel fasteners
- 1116** Alum. clamp and fasteners
- 1117** Alum. clamp, Stainless Steel fasteners
- 1100SS** Stainless Steel clamp and fasteners

| Pipe Size | Stock Thickness | Hanging Load Rating/lbs. | Wt./100 pcs |
|-----------|-----------------|--------------------------|-------------|
| 3/8" | .060 | 400 | 10 |
| 1/2" | | | 11 |
| 3/4" | | | 15 |
| 1" | .075 | 600 | 17 |
| 1 1/4" | | | 19 |
| 1 1/2" | | | 29 |
| 2" | .105 | 800 | 34 |
| 2 1/2" | | | 40 |
| 3" | | | 47 |
| 3 1/2" | .125 | 1,000 | 62 |
| 4" | | | 67 |
| 5" | | | 80 |
| 6" | .135 | 1,000 | 102 |
| 8" | | | 130 |
| 10" | | | 143 |
| 12" | | | 174 |

MATERIAL:

Power-Strut pipe, conduit and O.D. tubing clamps are made on punch press dies from hot rolled, pickled and oiled steel which conforms to the ASTM A-1008, A-1011 SS, A-575 and A-576 standards. Select sizes of O.D. tubing clamps are available in stainless steel or aluminum.

STANDARD FINISH:

All steel clamps are electro-galvanized. Select sizes of O.D. tubing clamps are available in copper plated finish. PVC coatings are available upon special request.

ORDERING INFORMATION:

When ordering, add the length or size and finish to the part number.

RECOMMENDED BOLT TORQUE:

| Bolt Size | 1/4"-20 | 5/16"-18 | 3/8"-16 | 1/2"-13 | 5/8"-11 | 3/4"-10 |
|------------------------------|---------|----------|---------|---------|---------|---------|
| Rec. Torque Ft/Lbs | 6 | 11 | 19 | 50 | 100 | 125 |
| Max. Torque Ft/Lbs | 7 | 15 | 25 | 70 | 125 | 135 |

Project: _____
 Architect / Engineer: _____
 Date: _____ Phone: _____
 Contractor: _____
 Address: _____

Approval Stamp:

Notes 1: _____

 Notes 2: _____
