

TEMPSTAR®

Heating and Cooling Products



END4X, ENW4X, ENA4X

Product Specifications

VERTICAL EVAPORATOR COILS

ALL N COIL MODELS

- 1½ thru 5 Tons
- Available for environmentally sound R-410A systems
- Bolt-on TXV metering device factory installed on all models (equalizer tube brazed in)
- Two condensate drain connections
- Aluminum hairpin/return-bend/fin "N" coil with the latest high-tech fin design

CASED N COILS

- Removable front access panel
- Hemmed flanges for safer handling
- Foil faced insulation
- Non-sweat cabinet, even at extreme conditions
- Cabinets meet or exceed 2% air leakage codes
- Sturdy, pre-painted steel cabinet

END4X

- Upflow or downflow installation
- Compact design, shorter than comparable A-coils
- Cabinet widths match flush with ICP 14-3/16", 17-1/2", 21" and 24-1/2" gas furnace cabinets (field fabricated transitions required to match other ICP furnace models)

ENW4X

- Upflow or downflow installation
- Drainpan raised 2" (51mm) and block-off plate factory installed — for installing wider coil on narrower furnace

UNCASED N COILS

ENA4X

- Upflow or downflow installation

WARRANTY*

- 5 year parts limited warranty
 - With timely registration, an additional 5 year parts limited warranty


* Applies to original purchaser/homeowner, some limitations may apply. See Warranty certificate for complete details.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.




COIL MODEL NUMBER IDENTIFICATION GUIDE										
Digit Position	1	2	3	4	5	6,7	8	9,10	11	12
	E	N	D	4	X	18	L	14	A	1
E = Evaporator										
B = Builder										
D = Standard										
N = N Coil		TYPE								
A = Uncased										
D = Cased Upflow/Downflow										
M = Cased Multiposition (Upflow/Downflow/Horizontal)										
W = Cased Upflow/Downflow for narrower furnaces										
H = Cased Horizontal		INSTALLATION								
4 = Environmentally Sound R-410A				REFRIGERANT						
P = Piston										
X = TXV										METERING DEVICE
18 = 18,000 BTUH = 1½ tons										
19 = 18,000 BTUH = 1½ tons										
24 = 24,000 BTUH = 2 tons										
30 = 30,000 BTUH = 2½ tons										
31 = 30,000 BTUH = 2½ tons										
36 = 36,000 BTUH = 3 tons										
37 = 36,000 BTUH = 3 tons										
42 = 42,000 BTUH = 3½ tons										
43 = 42,000 BTUH = 3½ tons										
48 = 48,000 BTUH = 4 tons										
60 = 60,000 BTUH = 5 tons										
61 = 60,000 BTUH = 5 tons										NOMINAL CAPACITY
L = Aluminum							HAIRPIN MATERIAL			
14 = 14-3/16"										
17 = 17-1/2"										
21 = 21"										
24 = 24-1/2"										WIDTH
Sales Digit (Major Revision)										
Engineering Digit (Minor Revision)										

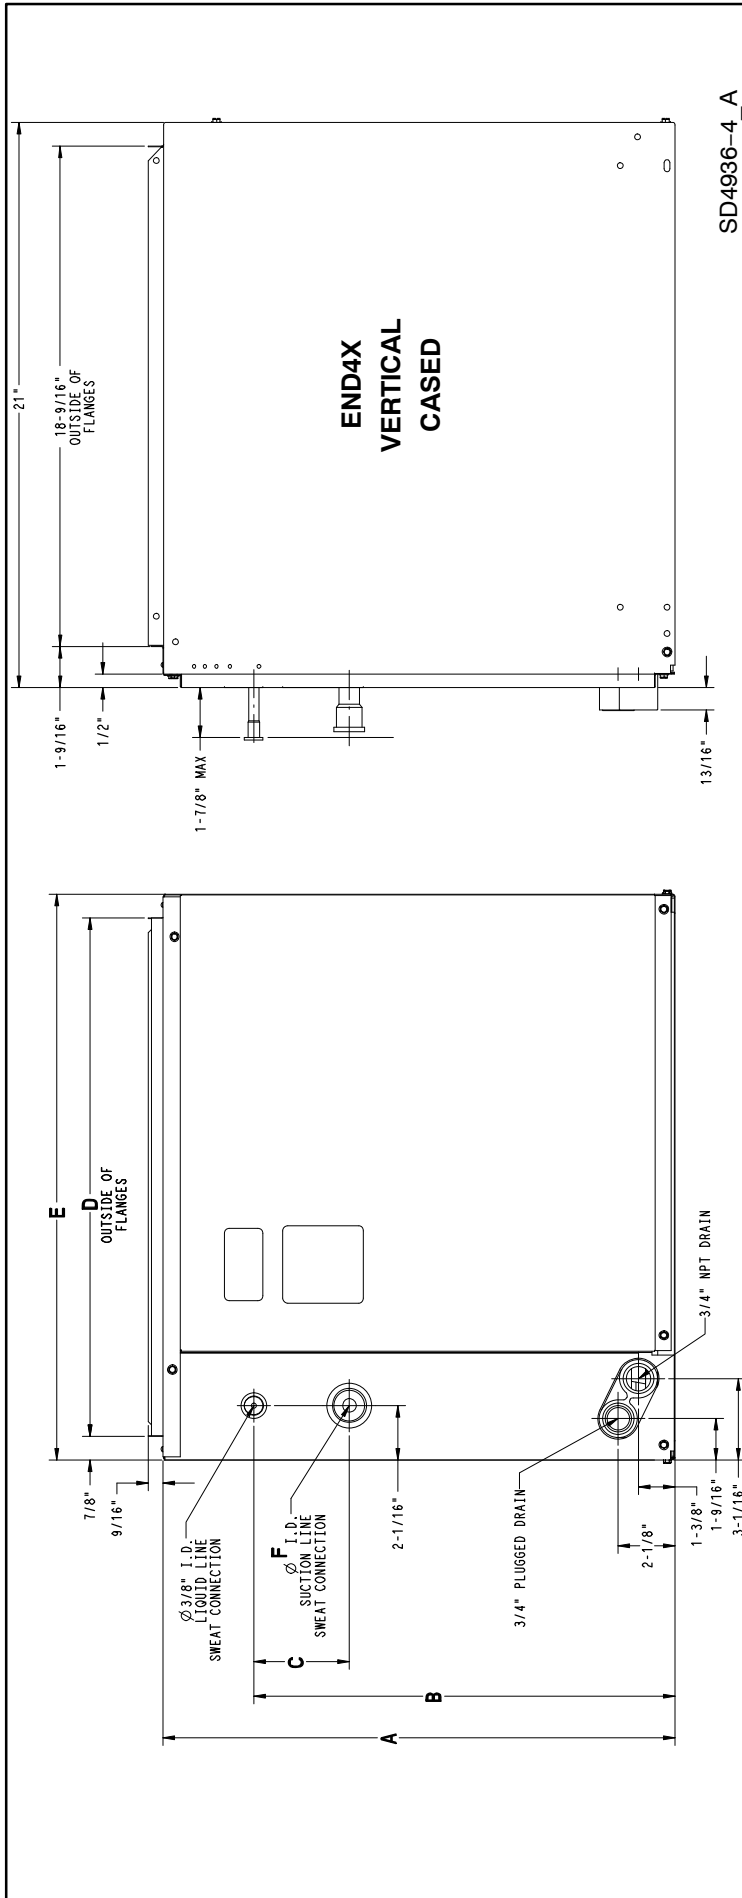

SD4936-4_A


DIMENSIONAL DATA — END4X

Model	Size (tons)	Inches - English (MM - SI Metric)										Shipping Weight	
		A	B	C	D	E	F	Aluminum	lbs (kg)				
END4X18L14	1-1/2	12-5/8 (321)	10-1/16 (256)	5-5/16 (135)	12-1/2 (318)	14-3/16 (360)	5/8 (16)	36 (16)					
END4X19L17	1-1/2	17 (432)	13-7/8 (352)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	3/4 (19)	35 (16)					
END4X24L14	2	14-5/8 (372)	12-1/16 (306)	5-5/16 (135)	12-1/2 (318)	14-3/16 (360)	5/8 (16)	40 (18)					
END4X24L17	2	14-5/8 (372)	10-1/16 (256)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	5/8 (16)	40 (18)					
END4X30L14	2-1/2	17 (432)	13-5/8 (346)	5-5/16 (135)	12-1/2 (318)	14-3/16 (360)	3/4 (19)	47 (21)					
END4X30L17	2-1/2	17 (432)	13-7/8 (352)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	3/4 (19)	47 (21)					
END4X31L17	2-1/2	23-1/4 (591)	17-1/2 (445)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	3/4 (19)	46 (21)					
END4X36L17	3	17 (432)	13-7/8 (352)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	3/4 (19)	49 (22)					
END4X36L21	3	17 (432)	13-9/16 (345)	3-9/16 (91)	19-1/4 (489)	21 (533)	3/4 (19)	48 (22)					
END4X37L17	3	27-3/16 (691)	17-1/2 (445)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	7/8 (22)	45 (21)					
END4X42L17	3-1/2	21-1/8 (537)	13-7/8 (352)	3-9/16 (91)	15-3/4 (400)	17-1/2 (445)	7/8 (22)	52 (24)					
END4X42L21	3-1/2	19 (483)	15-5/8 (397)	3-9/16 (91)	19-1/4 (489)	21 (533)	7/8 (22)	57 (26)					
END4X43L24	3-1/2	26-5/16 (669)	17-15/16 (456)	3-9/16 (91)	22-3/4 (578)	24-1/2 (622)	7/8 (22)	58 (26)					
END4X48L21	4	22-1/16 (560)	17-1/2 (445)	3-9/16 (91)	19-1/4 (489)	21 (533)	7/8 (22)	66 (30)					
END4X48L24	4	22-1/16 (560)	17-1/4 (438)	3-9/16 (91)	22-3/4 (578)	24-1/2 (622)	7/8 (22)	62 (28)					
END4X60L24	5	26-7/8 (683)	17-15/16 (456)	3-9/16 (91)	22-3/4 (578)	24-1/2 (622)	7/8 (22)	78 (35)					
END4X61L24	5	32-7/16 (824)	17-15/16 (456)	3-9/16 (91)	22-3/4 (578)	24-1/2 (622)	7/8 (22)	84 (38)					

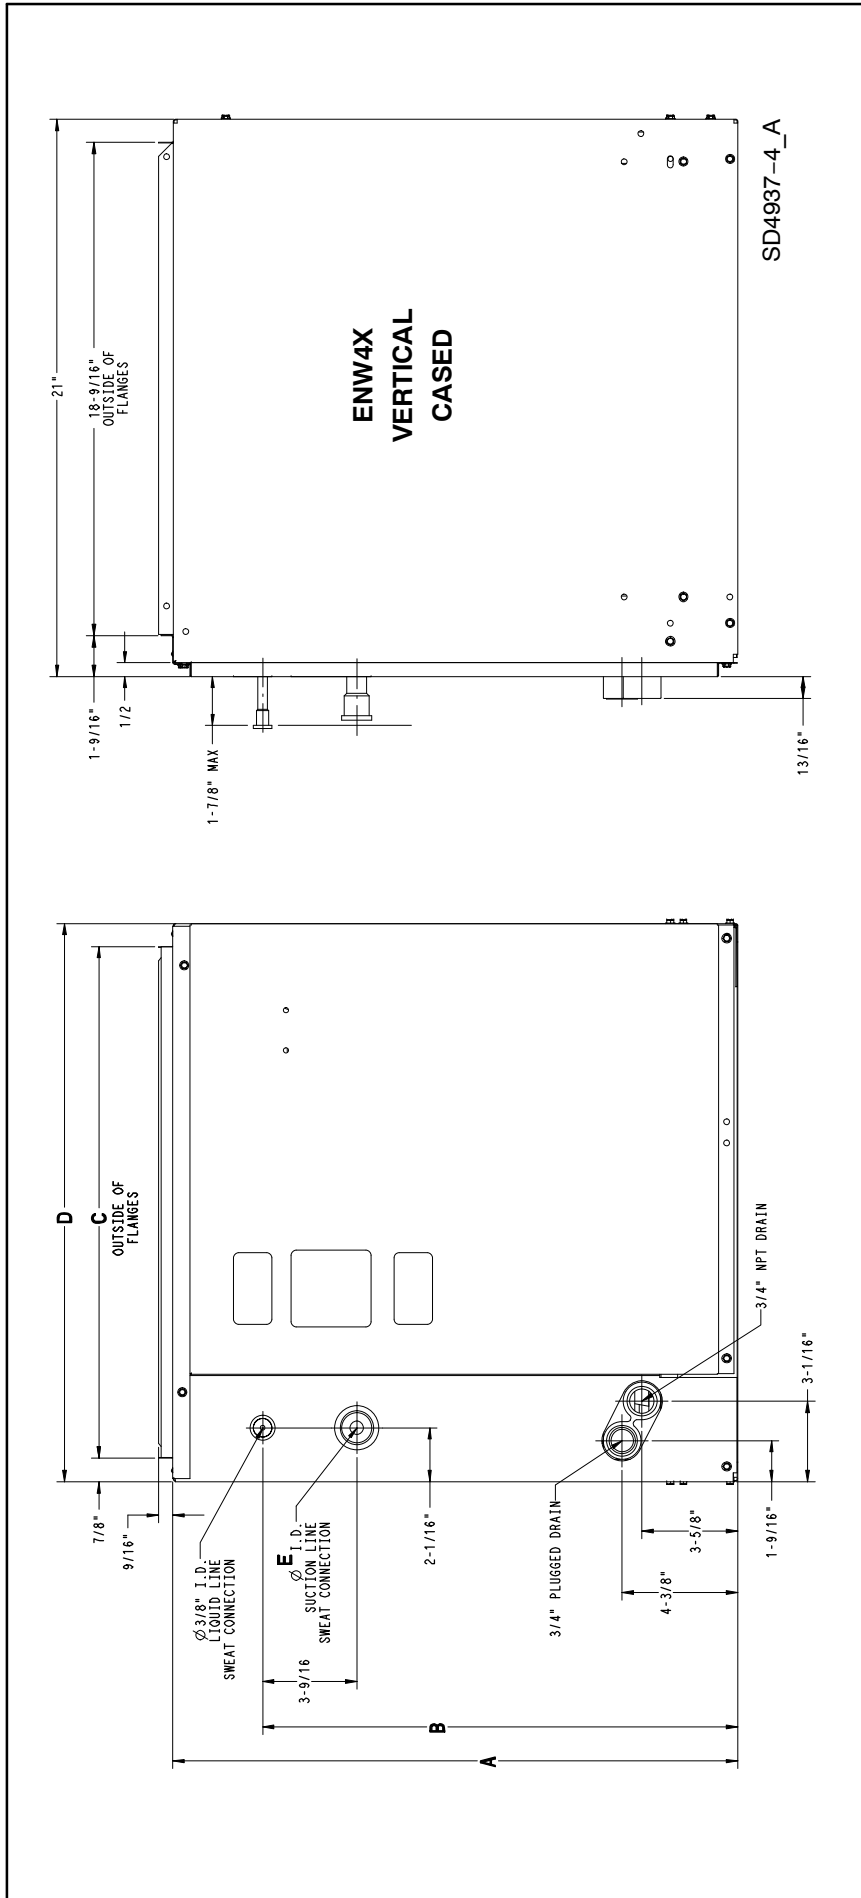

DIMENSIONAL DATA — ENW4X

Model	Size (tons)	Inches – English (MM – SI Metric)				Shipping Weight lbs (kg)	
		A	B	C	D	E	Aluminum
ENW4X36L17	3	19-13/16 (503)	16-1/8 (410)	15-3/4 (400)	17-1/2 (445)	3/4 (19)	49 (22)
ENW4X42L21	3-1/2	21-13/16 (554)	17-7/8 (454)	19-1/4 (489)	21 (533)	7/8 (22)	62 (28)
ENW4X48L21	4	24-7/8 (632)	19-3/4 (502)	19-1/4 (489)	21 (533)	7/8 (22)	71 (32)
ENW4X60L24	5	29-1/8 (740)	20-3/16 (513)	22-3/4 (578)	24-1/2 (622)	7/8 (22)	78 (35)

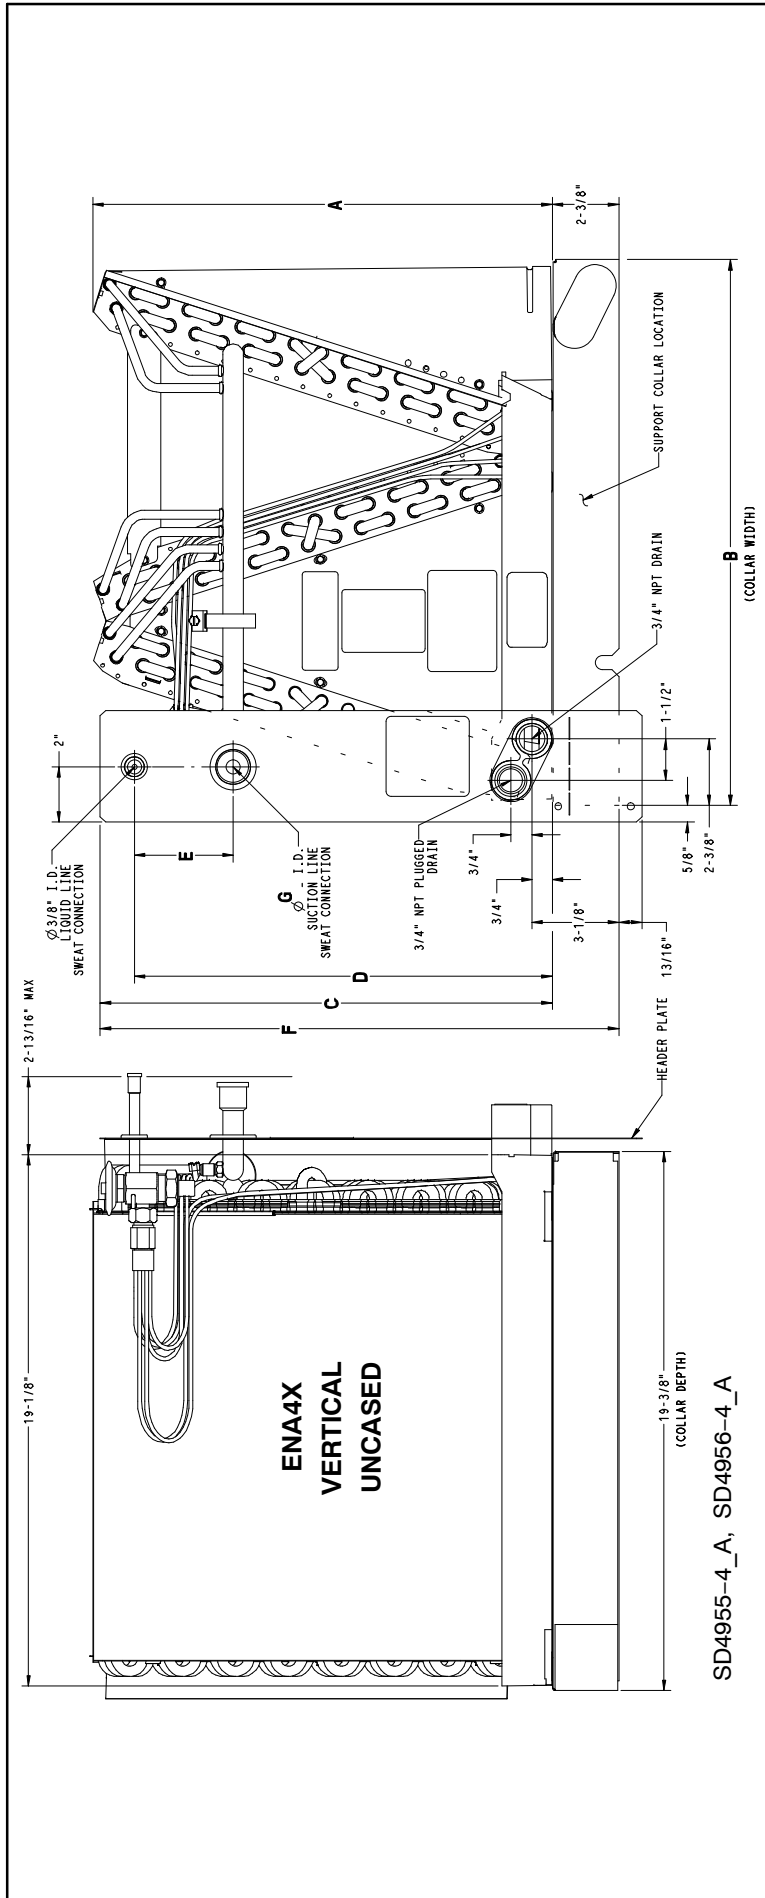


DIMENSIONAL DATA — ENA4X


Inches – English (MM – SI Metric)

Model	Size (tons)	Dimensions (Inches)							Shipping Weight lbs (kg)
		A	B (Collar Width)	C	D	E	F	G	
ENA4X18L14	1-1/2	10-7/8 (276)	12-7/8 (327)	10-5/8 (270)	9-3/8 (238)	5-5/16 (135)	13 (330)	5/8 (16)	17 (8)
ENA4X19L17	1-1/2	14-11/16 (373)	16-1/4 (413)	14-1/2 (369)	13-1/4 (337)	3-9/16 (91)	16-15/16 (429)	3/4 (19)	25 (11)
ENA4X24L14	2	12-7/8 (327)	12-7/8 (327)	12-5/8 (321)	11-7/16 (291)	5-5/16 (135)	15 (381)	5/8 (16)	21 (10)
ENA4X24L17	2	12-11/16 (322)	16-1/4 (413)	10-5/8 (270)	9-3/8 (238)	3-9/16 (91)	13 (330)	5/8 (16)	22 (10)
ENA4X30L14	2-1/2	14-7/8 (378)	12-7/8 (327)	14-3/16 (360)	13 (330)	5-5/16 (135)	16-9/16 (421)	3/4 (19)	23 (10)
ENA4X30L17	2-1/2	14-11/16 (373)	16-1/4 (413)	14-7/16 (367)	13-1/4 (337)	3-9/16 (91)	16-13/16 (427)	3/4 (19)	24 (11)
ENA4X31L17	2-1/2	20-3/4 (527)	16-1/4 (413)	18-1/16 (459)	16-13/16 (427)	3-9/16 (91)	20-7/16 (519)	3/4 (19)	31 (14)
ENA4X36L17	3	14-11/16 (373)	16-1/4 (413)	14-7/16 (367)	13-1/4 (337)	3-9/16 (91)	16-13/16 (427)	3/4 (19)	26 (12)
ENA4X36L21	3	14-7/16 (367)	19-5/8 (499)	14-7/16 (367)	12-15/16 (329)	3-9/16 (91)	16-5/8 (422)	3/4 (19)	27 (12)
ENA4X36L17	3	24-3/4 (629)	16-1/4 (413)	18-1/16 (459)	16-13/16 (427)	3-9/16 (91)	20-7/16 (519)	7/8 (22)	33 (14)
ENA4X42L21	3-1/2	16-1/2 (419)	19-5/8 (499)	16-3/16 (411)	15 (381)	3-9/16 (91)	18-9/16 (472)	7/8 (22)	29 (13)
ENA4X43L24	3-1/2	24-3/8 (619)	23-1/8 (587)	18-9/16 (472)	17-5/16 (440)	3-9/16 (91)	20-15/16 (532)	7/8 (22)	36 (16)
ENA4X48L21	4	20-9/16 (522)	19-5/8 (499)	18-1/16 (459)	16-7/8 (429)	3-9/16 (91)	20-7/16 (519)	7/8 (22)	33 (15)
ENA4X48L24	4	20-5/16 (516)	23-1/8 (587)	17-7/8 (454)	16-5/8 (422)	3-9/16 (91)	20-1/4 (514)	7/8 (22)	34 (15)
ENA4X60L24	5	24-3/8 (619)	23-1/8 (587)	18-1/2 (470)	17-5/16 (440)	3-9/16 (91)	20-7/8 (530)	7/8 (22)	35 (16)
ENA4X61L24	5	30-1/2 (774)	23-1/8 (587)	18-9/16 (472)	17-5/16 (440)	3-9/16 (91)	20-15/16 (532)	7/8 (22)	40 (18)


SI Metric Drawing – END4X

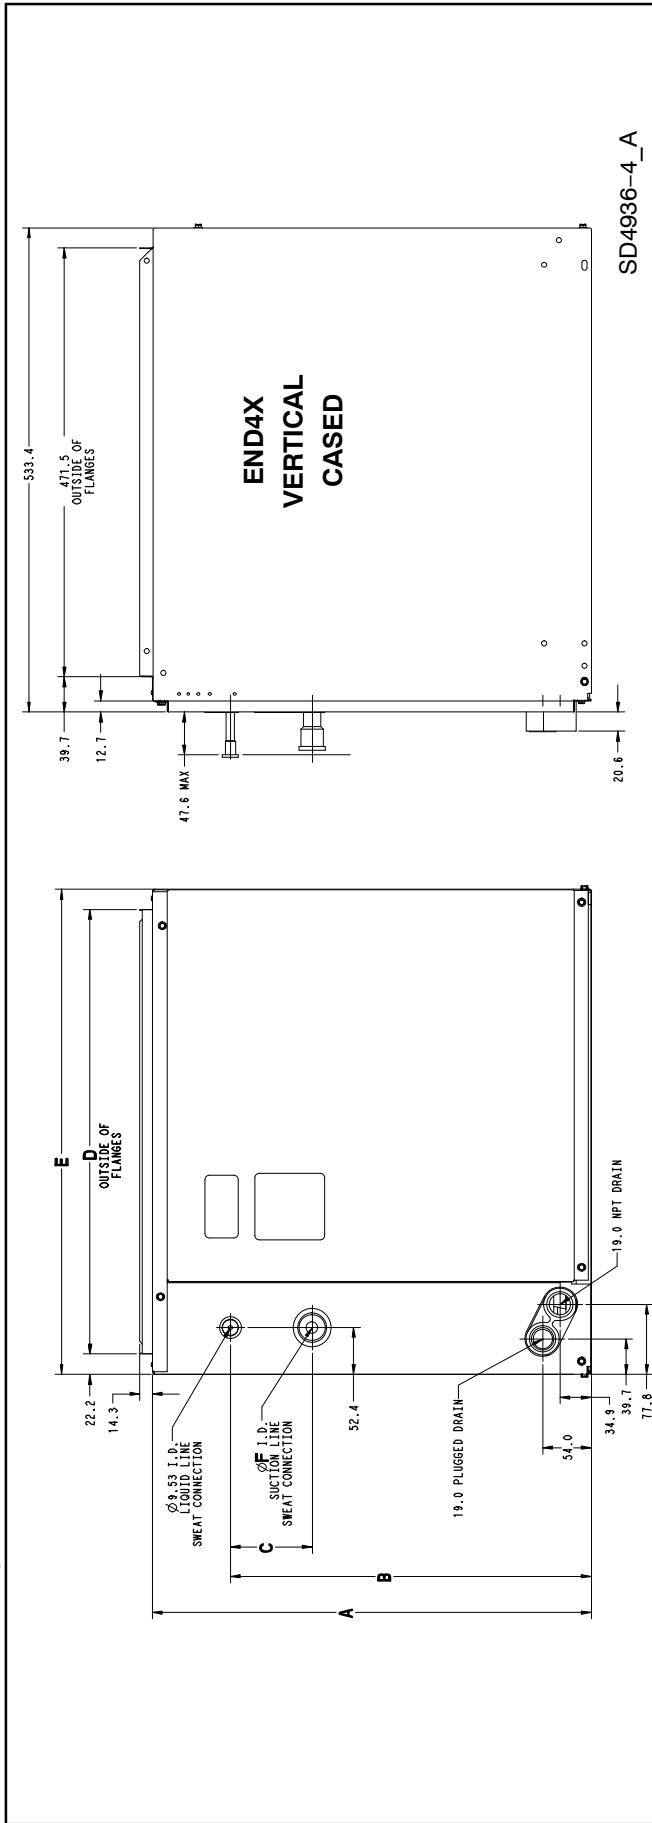

SI Metric Drawing – ENW4X

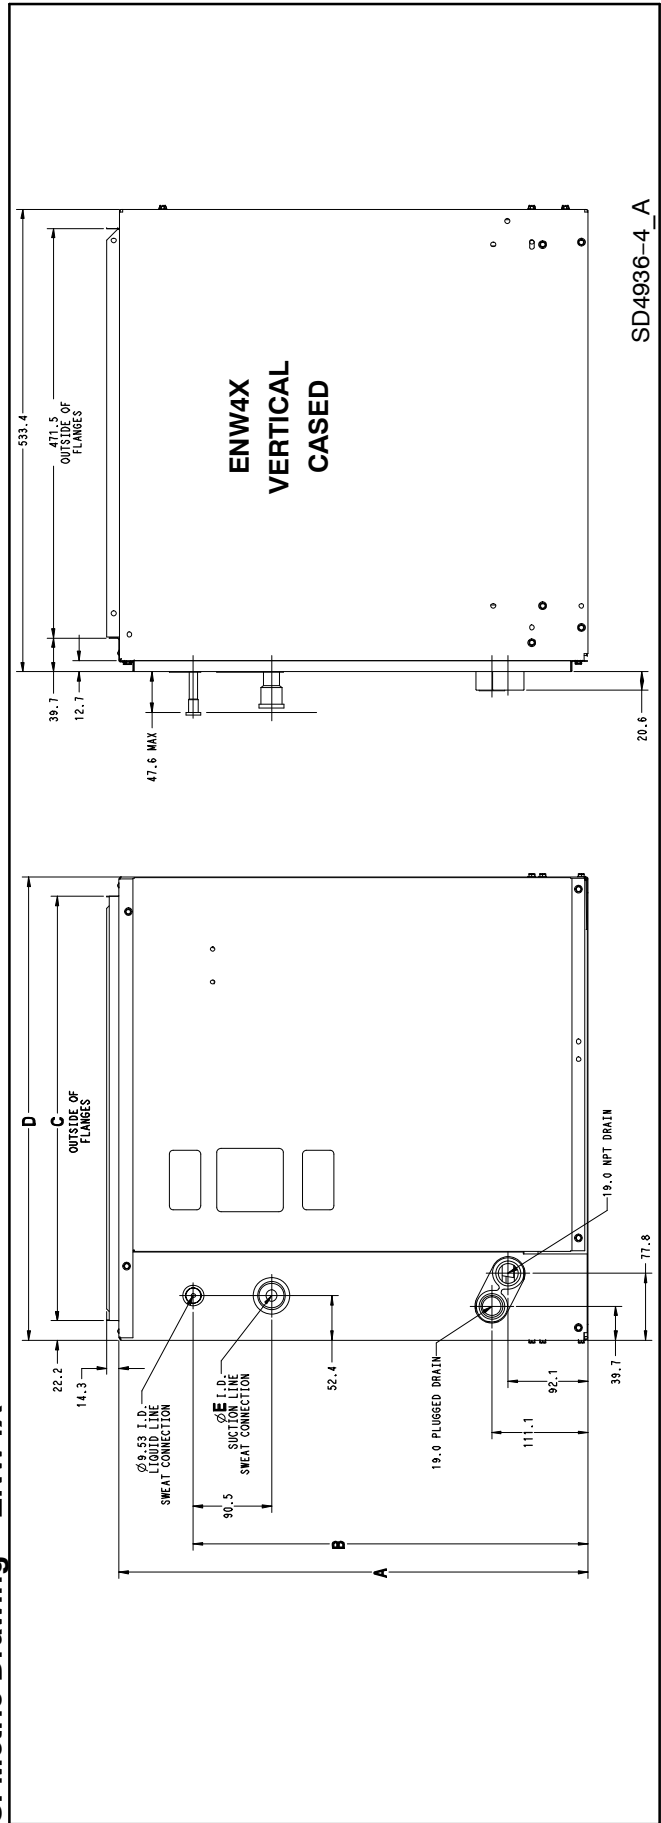

SI Metric Drawing – ENA4X

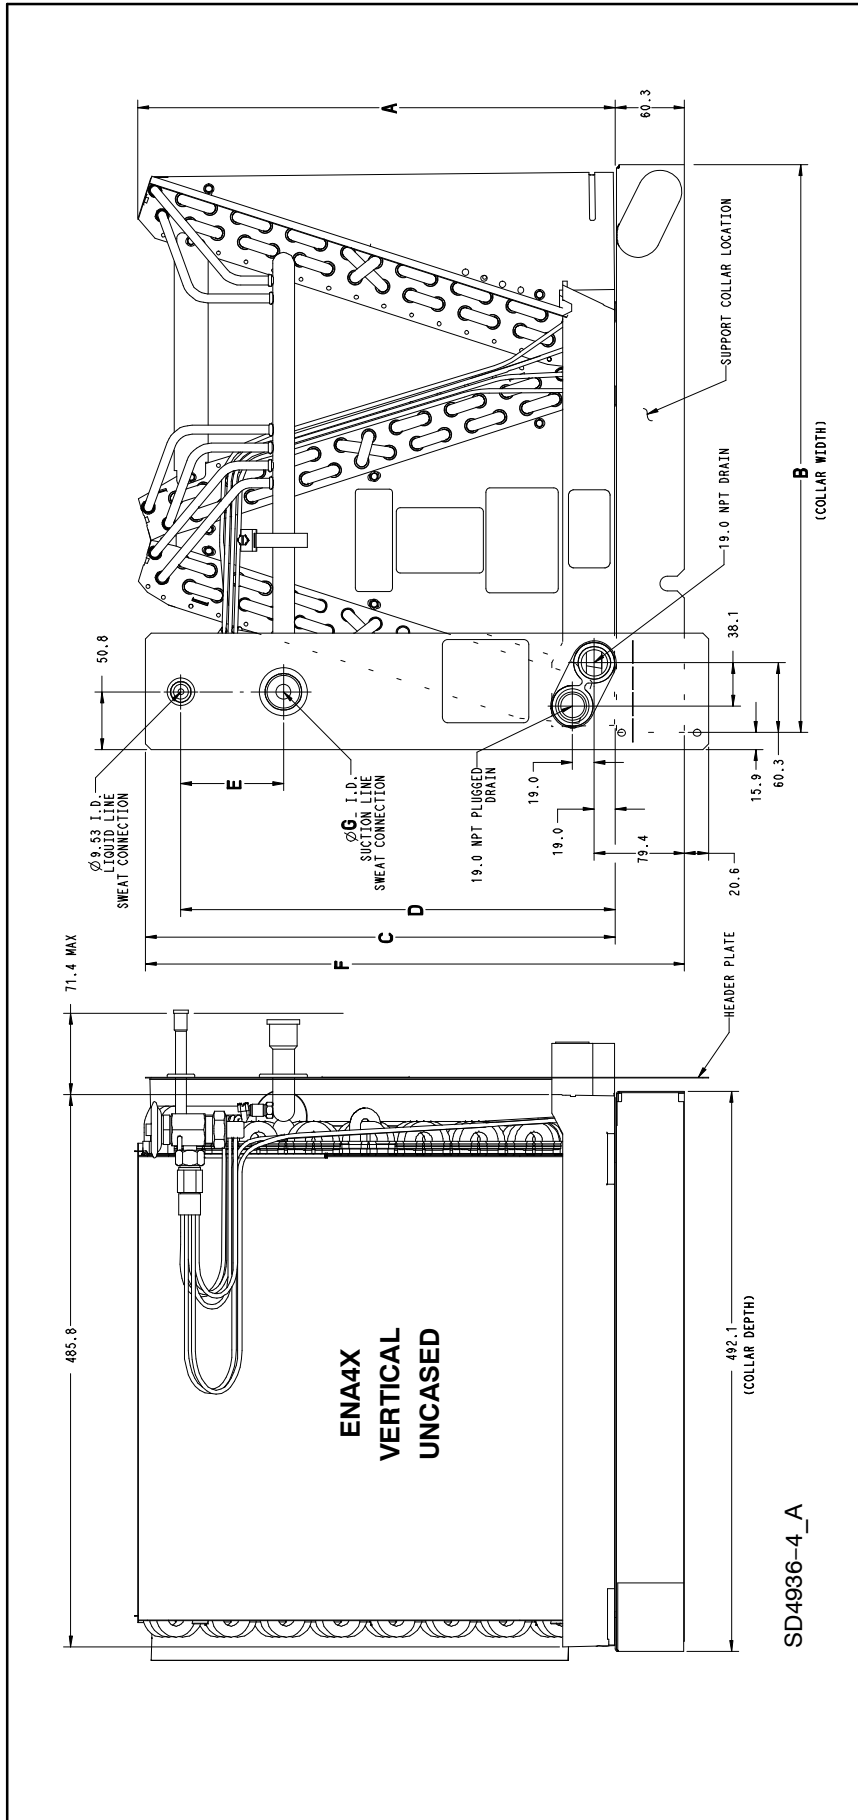

PHYSICAL DATA												
END4X		Model Size										
		18L14	19L17	24L(14,17)	30L(14,17)	31L17	36L(17,21)	37L17	42L(17,21)	43L24	48L(21,24)	60L24
Nominal Acceptable CFM Range												
CFM (L/s) - min	525 (248)	700 (330)	875 (413)	1050 (496)	1225 (578)	1400 (661)	1750 (826)	1800 (849)	1800 (849)	1800 (849)	1750 (826)	2000 (944)
CFM (L/s) - max	625 (295)	900 (425)	1125 (531)	1350 (637)	1600 (755)	1800 (849)	2000 (944)	2000 (944)	2000 (944)	2000 (944)	2000 (944)	2000 (944)
Coil Data (all coils 2 slab "A" configuration, lanced sine wave bare aluminum fin)												
Face Area ft ² (m ²)	3.34 (0.31)	4.68 (0.43)	4.01 (0.37)	4.68 (0.43)	6.68 (0.62)	8.02 (0.75)	5.35 (0.50)	8.02 (0.75)	8.02 (0.75)	6.68 (0.62)	8.02 (0.75)	10.03 (0.93)
Each Slab H x L in. (mm)	10 x 16 (254 x 406)	14 x 16 (355 x 406)	12 x 16 (305 x 406)	14 x 16 (355 x 406)	20 x 16 (508 x 406)	20 x 16 (508 x 406)	16 x 16 (406 x 406)	16 x 16 (406 x 406)	24 x 16 (610 x 406)	20 x 16 (508 x 406)	24 x 16 (610 x 406)	30 x 16 (762 x 406)
Fins Per Inch	17	16	16	16	16	17	16	17	17	16	17	17
Refrigerant Line Connections (sweat)												
Liquid in. (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Suction in. (mm)	5/8 (16)	3/4 (19)	3/4 (19)	3/4 (19)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)

PHYSICAL DATA		
Model Size		
ENW4X	36L17	60L24
Nominal Acceptable CFM Range		
CFM (L/s) - min	1050 (496)	1400 (661)
CFM (L/s) - max	1350 (637)	1800 (849)
Coil Data (all coils 2 slab "A" configuration, lanced sine wave bare aluminum fin)		
Face Area ft ² (m ²)	4.68 (0.43)	8.02 (0.75)
Each Slab H x L in. (mm)	14 x 16 (355 x 406)	24 x 16 (610 x 406)
Fins Per Inch	16	17
Refrigerant Line Connections (sweat)		
Liquid in. (mm)	3/8 (10)	3/8 (10)
Suction in. (mm)	3/4 (19)	7/8 (22)

PHYSICAL DATA												
ENA4X		Model Size										
		18L14	19L17	24L(14,17)	30L(14,17)	31L17	36L(17,21)	37L17	42L(17,21)	43L24	48L(21,24)	60L24
Nominal Acceptable CFM Range												
CFM (L/s) - min	525 (248)	700 (330)	875 (413)	1050 (496)	1225 (578)	1400 (661)	1750 (826)	1800 (849)	1800 (849)	1800 (849)	1750 (826)	2000 (944)
CFM (L/s) - max	625 (295)	900 (425)	1125 (531)	1350 (637)	1600 (755)	1800 (849)	2000 (944)	2000 (944)	2000 (944)	2000 (944)	2000 (944)	2000 (944)
Coil Data (all coils 2 slab "A" configuration, lanced sine wave bare aluminum fin)												
Face Area ft ² (m ²)	3.34 (0.31)	4.68 (0.43)	4.01 (0.37)	4.68 (0.43)	6.68 (0.62)	8.02 (0.75)	5.35 (0.50)	8.02 (0.75)	8.02 (0.75)	6.68 (0.62)	8.02 (0.75)	10.03 (0.93)
Each Slab H x L in. (mm)	10 x 16 (254 x 406)	14 x 16 (355 x 406)	12 x 16 (305 x 406)	14 x 16 (355 x 406)	20 x 16 (508 x 406)	20 x 16 (508 x 406)	16 x 16 (406 x 406)	16 x 16 (406 x 406)	24 x 16 (610 x 406)	20 x 16 (508 x 406)	24 x 16 (610 x 406)	30 x 16 (762 x 406)
Fins Per Inch	17	16	16	16	16	17	16	17	17	16	17	17
Refrigerant Line Connections (sweat)												
Liquid in. (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Suction in. (mm)	5/8 (16)	3/4 (19)	3/4 (19)	3/4 (19)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)

COIL STATIC PRESSURE DROP (in. w.c.)																				
UNIT SIZE	Standard CFM																			
	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	
18L14	Dry																			
	0.078	0.114	0.156	0.198	0.253															
19L17	Wet																			
	0.096	0.138	0.183	0.213	0.277															
24L14	Dry																			
	0.070	0.103	0.143	0.182	0.233	0.290	0.354													
24L17	Wet																			
	0.089	0.128	0.171	0.214	0.269	0.336	0.413													
30L14	Dry																			
	0.048	0.068	0.090	0.112	0.140	0.170	0.203													
30L17	Wet																			
	0.064	0.091	0.122	0.150	0.188	0.224	0.263													
31L17	Dry																			
	0.065	0.097	0.135	0.173	0.223	0.278	0.339	0.405	0.478											
36L17	Wet																			
	0.078	0.114	0.160	0.206	0.260	0.321	0.388	0.461	0.540											
36L21	Dry																			
	0.042	0.060	0.080	0.102	0.128	0.157	0.188	0.222	0.259											
37L17	Wet																			
	0.055	0.076	0.104	0.127	0.158	0.190	0.225	0.266	0.309											
42L17	Dry																			
	0.031	0.046	0.063	0.083	0.105	0.130	0.156	0.193	0.230											
42L21	Wet																			
	0.039	0.056	0.075	0.097	0.121	0.149	0.179	0.212	0.249											
48L21	Dry																			
	0.043	0.061	0.082	0.103	0.128	0.157	0.189	0.221	0.259	0.299	0.341									
48L24	Wet																			
	0.056	0.079	0.107	0.133	0.166	0.200	0.236	0.276	0.315	0.361	0.413									
60L24	Dry																			
	0.035	0.048	0.062	0.076	0.093	0.111	0.132	0.153	0.177	0.201	0.228									
61L24	Wet																			
	0.049	0.066	0.085	0.100	0.122	0.144	0.171	0.192	0.217	0.245	0.276									
61L24	Dry																			
	0.025	0.038	0.054	0.072	0.093	0.117	0.143	0.171	0.205	0.233	0.273									
61L24	Wet																			
	0.030	0.044	0.061	0.079	0.103	0.125	0.154	0.182	0.216	0.251	0.288									
61L24	Dry																			
			0.072	0.093	0.118	0.145	0.175	0.206	0.243	0.281	0.322	0.366	0.413							
61L24	Wet																			
			0.079	0.102	0.130	0.159	0.192	0.228	0.26	0.303	0.348	0.396	0.446							
61L24	Dry																			
	0.030	0.041	0.054	0.066	0.082	0.099	0.118	0.137	0.158	0.180	0.205	0.231	0.259							
61L24	Wet																			
	0.043	0.059	0.078	0.101	0.126	0.153	0.181	0.207	0.234	0.260	0.288	0.319	0.354							
61L24	Dry																			
				0.053	0.062	0.073	0.084	0.097	0.111	0.126	0.138	0.154	0.172	0.190	0.210					
61L24	Wet																			
				0.067	0.082	0.096	0.112	0.129	0.145	0.163	0.171	0.191	0.212	0.235	0.258					
61L24	Dry																			
				0.047	0.060	0.075	0.092	0.110	0.130	0.152	0.176	0.204	0.230	0.256	0.284	0.318				
61L24	Wet																			
				0.053	0.067	0.085	0.104	0.125	0.147	0.172	0.200	0.228	0.259	0.292	0.327	0.365				
61L24	Dry																			
				0.015	0.046	0.057	0.069	0.094	0.100	0.119	0.124	0.140	0.158	0.175	0.195	0.214				
61L24	Wet																			
				0.032	0.050	0.066	0.081	0.097	0.114	0.131	0.150	0.169	0.190	0.211	0.233	0.257				
61L24	Dry																			
					0.062	0.073	0.084	0.097	0.111	0.126	0.138	0.154	0.172	0.190	0.210	0.228	0.251	0.273	0.293	
61L24	Wet																			
					0.082	0.096	0.112	0.129	0.145	0.163	0.171	0.191	0.212	0.235	0.258	0.283	0.310	0.336	0.366	
61L24	Dry																			
											0.130	0.140	0.160	0.180	0.200	0.220	0.240	0.270	0.290	
61L24	Wet																			
											0.150	0.170	0.190	0.210	0.230	0.260	0.290	0.310	0.340	

COOLING CAPACITIES (MBH)

Table with columns: UNIT SIZE, INDOOR COIL AIR (CFM, EWB), SATURATED TEMPERATURE LEAVING EVAPORATOR °F (°C) (30 (-1), 35 (2), 40 (4), 45 (7), 50 (10)). Rows include unit sizes 18, 19, 24, 30, 31, 36, and 37, each with multiple CFM and EWB values and corresponding TC, SHC, and BF values.

— Continued on next page —

Legend:

CFM - Cubic Ft. per Minute EWB - Entering Wet Bulb LWB - Leaving Wet Bulb TC - Gross Cooling Capacity 1000 Btuh
SHC - Gross Sensible Capacity 1000 Btuh BF - Bypass Factor MBH - 1000 Btuh

See notes following.

COOLING CAPACITIES (MBH) (cont)																	
UNIT SIZE	INDOOR COIL AIR		SATURATED TEMPERATURE LEAVING EVAPORATOR °F (°C)														
			30 (-1)			35 (2)			40 (4)			45 (7)			50 (10)		
	CFM	EWB	TC	SHC	BF	TC	SHC	BF	TC	SHC	BF	TC	SHC	BF	TC	SHC	BF
42	1050	72 (22)	74.40	36.30	0.00	68.10	33.10	0.00	61.20	29.70	0.00	53.50	26.20	0.01	45.00	22.60	0.02
		67 (19)	62.30	37.60	0.02	56.00	34.20	0.03	48.90	30.60	0.03	41.20	27.00	0.03	32.80	23.30	0.03
		62 (17)	51.40	38.60	0.03	44.90	35.00	0.03	37.90	31.40	0.03	30.60	27.80	0.04	24.40	24.40	0.08
	1400	72 (22)	90.20	43.80	0.00	82.60	40.10	0.00	74.10	36.20	0.01	64.70	32.00	0.04	54.40	27.60	0.05
		67 (19)	75.80	46.00	0.05	68.00	42.00	0.05	59.40	37.70	0.06	50.00	33.40	0.06	39.60	28.90	0.06
		62 (17)	62.60	47.70	0.06	54.70	43.50	0.06	46.20	39.20	0.06	37.50	35.00	0.07	30.70	30.70	0.13
	1750	72 (22)	103.00	50.00	0.00	94.30	46.00	0.00	84.60	41.50	0.05	73.90	36.80	0.06	62.00	32.00	0.07
		67 (19)	86.70	53.10	0.08	77.80	48.60	0.08	68.00	43.90	0.08	57.10	39.00	0.08	45.20	33.90	0.09
		62 (17)	71.70	55.70	0.09	62.70	50.90	0.09	53.10	46.20	0.09	43.40	41.50	0.10	36.30	36.30	0.18
43	1050	72 (22)	96.72	47.64	0.00	89.31	43.85	0.00	80.91	39.78	0.00	71.39	35.44	0.00	60.74	30.89	0.01
		67 (19)	80.93	49.26	0.01	73.30	45.20	0.01	64.67	40.88	0.01	54.97	36.34	0.01	43.99	31.53	0.01
		62 (17)	66.64	50.56	0.01	58.77	46.28	0.01	50.10	41.84	0.01	40.70	37.29	0.02	32.63	32.63	0.07
	1400	72 (22)	117.07	57.30	0.00	108.20	53.03	0.00	98.03	48.31	0.01	86.74	43.33	0.02	73.81	37.96	0.02
		67 (19)	98.18	60.23	0.03	89.03	55.55	0.03	78.69	50.55	0.03	66.93	45.19	0.03	53.54	39.46	0.03
		62 (17)	81.03	62.70	0.03	71.60	57.72	0.03	61.25	52.56	0.03	50.15	47.21	0.03	41.46	41.46	0.11
	1750	72 (22)	133.38	65.28	0.00	123.30	60.58	0.02	111.98	55.48	0.03	99.21	50.01	0.04	84.49	44.04	0.04
		67 (19)	112.09	69.50	0.04	101.79	64.41	0.05	90.14	58.95	0.05	76.76	52.99	0.05	61.46	46.55	0.05
		62 (17)	92.72	73.26	0.05	82.16	67.85	0.05	70.58	62.18	0.05	58.38	56.24	0.06	49.33	49.33	0.15
48	1200	72 (22)	79.30	38.70	0.00	72.90	35.40	0.00	65.70	31.90	0.00	57.70	28.20	0.00	48.80	24.40	0.01
		67 (19)	66.60	40.20	0.02	60.00	36.60	0.02	52.70	32.90	0.02	44.60	29.10	0.02	35.70	25.10	0.03
		62 (17)	55.00	41.30	0.03	48.30	37.60	0.03	40.90	33.80	0.03	33.10	30.00	0.03	26.30	26.30	0.07
	1600	72 (22)	96.00	46.60	0.00	88.30	42.90	0.00	79.60	38.90	0.00	69.90	34.50	0.03	59.10	30.00	0.04
		67 (19)	80.90	49.20	0.04	72.90	45.00	0.04	64.10	40.70	0.05	54.20	36.10	0.05	43.30	31.40	0.05
		62 (17)	67.00	51.20	0.05	58.80	46.80	0.05	49.90	42.30	0.05	40.70	37.90	0.05	33.30	33.30	0.11
	2000	72 (22)	109.40	53.10	0.00	100.70	49.10	0.00	90.90	44.60	0.03	79.90	39.80	0.05	67.50	34.70	0.06
		67 (19)	92.40	56.70	0.06	83.40	52.20	0.07	73.30	47.40	0.07	62.00	42.20	0.07	49.50	36.90	0.07
		62 (17)	76.70	59.70	0.07	67.50	54.90	0.08	57.40	49.90	0.08	47.20	44.90	0.08	39.50	39.50	0.16
60	1600	72 (22)	103.20	50.40	0.00	94.40	45.90	0.00	84.80	41.10	0.00	74.10	36.30	0.00	62.40	31.20	0.02
		67 (19)	86.40	52.10	0.02	77.50	47.20	0.02	67.80	42.30	0.02	57.10	37.20	0.03	45.40	32.10	0.03
		62 (17)	71.20	53.30	0.03	62.20	48.30	0.03	52.40	43.30	0.03	42.30	38.30	0.03	33.50	33.50	0.07
	2000	72 (22)	120.70	58.70	0.00	110.40	53.60	0.00	99.00	48.20	0.00	86.40	42.50	0.02	72.60	36.70	0.03
		67 (19)	101.20	61.30	0.03	90.70	55.70	0.04	79.20	50.00	0.04	66.60	44.10	0.04	52.80	38.10	0.05
		62 (17)	83.40	63.20	0.05	72.80	57.40	0.05	61.40	51.60	0.05	49.70	46.00	0.05	40.30	40.30	0.11
	2400	72 (22)	135.60	65.80	0.00	124.10	60.30	0.00	111.20	54.40	0.01	97.00	48.00	0.04	81.30	41.50	0.05
		67 (19)	113.90	69.30	0.05	102.10	63.20	0.06	89.10	56.90	0.06	74.80	50.30	0.06	59.20	43.60	0.06
		62 (17)	94.10	72.10	0.06	82.10	65.70	0.06	69.30	59.30	0.06	56.40	53.00	0.07	46.50	46.50	0.14
61	1600	72 (22)	146.13	71.69	0.00	134.50	65.77	0.00	121.56	59.54	0.00	106.83	52.86	0.00	90.32	45.83	0.01
		67 (19)	122.06	74.12	0.02	110.18	67.82	0.02	96.85	61.17	0.02	81.83	54.15	0.02	64.91	46.78	0.02
		62 (17)	100.28	76.03	0.02	88.07	69.40	0.02	74.72	62.59	0.02	60.46	55.67	0.02	48.56	48.56	0.08
	2000	72 (22)	169.63	82.84	0.00	156.39	76.39	0.00	141.33	69.41	0.01	124.36	61.86	0.02	105.10	53.83	0.02
		67 (19)	142.02	86.75	0.03	128.36	79.72	0.03	112.89	72.20	0.03	95.38	64.18	0.03	75.60	55.70	0.03
		62 (17)	116.90	89.93	0.03	102.76	82.43	0.03	87.41	74.75	0.03	71.17	66.88	0.04	58.57	58.57	0.11
	2400	72 (22)	189.44	92.42	0.00	174.81	85.58	0.00	158.22	77.98	0.02	139.30	69.76	0.03	117.75	60.94	0.04
		67 (19)	158.99	97.85	0.04	143.83	90.25	0.04	126.61	82.05	0.04	107.02	73.24	0.05	84.86	63.87	0.05
		62 (17)	131.10	102.40	0.05	115.46	94.29	0.05	98.49	85.91	0.05	80.79	77.29	0.06	67.60	67.60	0.14

Legend:

CFM – Cubic Ft. per Minute EWB – Entering Wet Bulb LWB – Leaving Wet Bulb TC – Gross Cooling Capacity 1000 Btuh
 SHC – Gross Sensible Capacity 1000 Btuh BF – Bypass Factor MBH – 1000 Btuh

See notes following.

NOTES:

1. Contact manufacturer for cooling capacities at conditions other than shown in table.
2. Formulas:

$$\text{Leaving db} = \text{entering db} - \frac{\text{sensible heat cap.}}{1.09 \times \text{CFM}}$$

$$\text{Leaving wb} = \text{wb corresponding to enthalpy of air leaving coil } (h_{LWB})$$

$$h_{LWB} = h_{EWB} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{CFM}}$$
 Where h_{EWB} = enthalpy of air entering coil
3. SHC is based on 80°F (27°C) db temperature of air entering the evaporator coil.
 Below 80°F (27°C) db, subtract (Correction Factor x CFM) from SHC.
 Above 80°F (27°C) db, add (Correction Factor x CFM) to SHC.
4. Direct interpolation is permissible. Do not extrapolate.
5. Fan motor heat has not been deducted.
6. All data points are based on 10°F (-12°C) superheat leaving coil and use of thermostatic expansion valve (TXV) device.
7. The END4X, ENW4X, and ENA4X coils can be used in any properly designed system using R-410A refrigerant.
8. Before using maximum cfm shown in table, check coil static pressure drop to ensure system blower can provide necessary static pressure needed for coil and duct systems.
9. Bypass Factor = 0 indicates no psychometric solution. Use bypass factor of next lower EWB for approximation.

BYPASS FACTOR	ENTERING AIR DRY BULB TEMPERATURE °F (°C)					
	79 (26)	78 (26)	77 (25)	76 (24)	75 (24)	Under 75 (24)
	81 (27)	82 (28)	83 (28)	84 (29)	84 (29)	Above 85 (29)
Correction Factor						
0.10	0.98	1.96	2.94	3.92	4.91	Use formula shown below
0.20	0.87	1.74	2.62	3.49	4.36	
0.30	0.76	1.53	2.29	3.05	3.82	

Interpolation is permissible.

Correction Factor = $1.09 \times (1 - BF) \times (db - 80)$