



Chain & Rigging



- Cable cutters
- Cable Sleeves
- Chains
- Chain hooks
- Connectors
- Load binders
- Shackles
- Pulleys
- Hooks
- Wire rope
- Shackles



CHAIN & RIGGING





Transport Chain (Grade 70)

Alloy steel, Class 7. A high strength, hardened and tempered chain made from alloy steel. For farm and truck load binding applications, towing, construction, and logging. Bright yellow dichromate finish. 4:1 design factor.

- Made to NACM specifications.
- Not to be used in overhead lifting applications.

PART#	CHAIN SIZE	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	WT./100'	PAIL	DRUM
70020	1/4"	1.24"	0.38"	3,150 lb	74 lb	--	800'
70021	5/16"	1.29"	0.44"	4,700 lb	100 lb	--	550'
70022	3/8"	1.38"	0.55"	6,600 lb	145 lb	--	400'
70023	1/2"	1.79"	0.72"	11,300 lb	264 lb	--	200'
70024	1/4"	1.24"	0.38"	3,150 lb	74 lb	130'	--
70025	5/16"	1.29"	0.44"	4,700 lb	100 lb	90'	--
70026	3/8"	1.38"	0.55"	6,600 lb	145 lb	64'	--
70034	1/4"	1.24"	0.38"	3,150 lb	74 lb	65'	--
70035	5/16"	1.29"	0.44"	4,700 lb	100 lb	50'	--
70036	3/8"	1.38"	0.55"	6,600 lb	145 lb	45'	--



Grade 30 Proof Coil Chain

Low carbon steel, Class 3. A durable and economical utility chain manufactured from carbon steel. For pulling stumps, lashing cargo, logging, towing, mooring, pipeline installations, and truck tailgates.

- Zinc plated finish.
- Made to NACM specifications.
- Not to be used in overhead lifting applications.

PART#	CHAIN SIZE	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	WT./100'	PAIL
70003	3/16"	0.98"	0.3"	800 lb	29 lb	250'
70004	1/4"	1.24"	0.38"	1,300 lb	52 lb	141'
70005-A	5/16"	1.29"	0.44"	1,900 lb	86 lb	62'
70005	5/16"	1.29"	0.44"	1,900 lb	86 lb	92'
70006	3/8"	1.38"	0.55"	2,650 lb	124 lb	63'
70007	3/16"	0.98"	0.3"	800 lb	29 lb	100'
70008	1/4"	1.24"	0.38"	1,300 lb	52 lb	65'
70013	3/16"	0.98"	0.3"	800 lb	29 lb	150'
70014	1/4"	1.24"	0.38"	1,300 lb	52 lb	100'
70015	5/16"	1.29"	0.44"	1,900 lb	86 lb	75'
70016	3/8"	1.38"	0.55"	2,650 lb	124 lb	45'



Coil Chain (Straight Link)

Low carbon steel, zinc plated. Used in guard chain applications, animal stakes, and farm implements.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70040	#4	0.12"	1.11"	0.21"	205 lb	100'	10 lb



Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Chain and Rigging

Chain



Passing Link Chain

Low carbon steel, zinc plated. General utility chain that resists kinks or knots.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70045	#2/0	0.19"	0.88"	0.47"	450 lb	120'	32 lb



Twist Link Machine Chain

Zinc plated. General utility chain that lays flat against a surface. Ideal for tie-down applications.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70050	#2/0	0.19"	0.73"	0.28"	520 lb	75'	34 lb
70051	#4	0.12"	0.52"	0.17"	200 lb	100'	13 lb



Double Loop Chain (Tenso Or Lion)

Zinc plated. For animal restraints, swings, door crash stops.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70060	#2/0	0.135"	1.82"	0.34"	255 lb	150'	17 lb
70063	#3	0.08"	1.10"	0.187"	90 lb	200'	6 lb



Double Loop Chain

Vinyl covered, blue or green.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	BOX LENGTH	WEIGHT/100'
70062	#2	0.091"	1.33"	0.167"	115 lb	125'	11 lb



Sash Chain

Zinc plated. Specifically designed to operate smoothly over pulleys. Ideal for hanging sash.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70075	#35	0.035"	0.57"	--	106 lb	100'	5.7 lb



Furnace Chain

Zinc plated. Light Duty, retainer chain.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	INSIDE WIDTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70080	#1/0	0.022"	0.50"	0.199"	35 lb	250'	2.3 lb



Single Jack Chain

Zinc plated. For animal restraints, swings, door crash stops.

PART#	TRADE SIZE	DIAMETER	INSIDE LENGTH	W.L.L.	REEL LENGTH	WEIGHT/100'
70085	#10T	0.135"	0.093"	43 lb	150'	14 lb
70086	#12	0.105"	0.75"	29 lb	100'	8.5 lb
70087	#14	0.080"	0.63"	16 lb	200'	4.8 lb

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Grade 70 - 5/16" Transport Chain Assemblies

Assembled with two plated alloy clevis grab hooks. Comes with aluminum capacity tag. Packaged in a plastic pail.

PART#	LENGTH	WLL	ULL
66051	16'	4,700lb	18,800lb
66052	20'	4,700lb	18,800lb



Grade 70 - 3/8" Transport Chain Assemblies

Assembled with two plated alloy clevis grab hooks. Comes with aluminum capacity tag. Packaged in a plastic pail.

PART#	LENGTH	WLL	ULL
66053	16'	6,600lb	26,400lb
66054	20'	6,600lb	26,400lb



Dynaline offers merchandisers for almost every product. If you are ordering the products above then you may be interested in the following Merchandiser. For more information on this merchandiser see the Merchandising Section at the front of the catalogue.

Chain Rack - 4'

PART#	CONTENTS
70099	Chain Rack Only, 47" wide x 73" high x 13" deep
70099K	Full 4' Chain Rack Merchandiser. Includes 12" x 48" Chain Rack Header and the most popular products.

Chain Rack - 2'

PART#	CONTENTS
70010	Chain Rack Only, 23" wide x 73" high x 13" deep
70010K	Full 2' Chain Rack Merchandiser. Includes 9" x 23" Dynaline Distributor sign (00003) and the most popular products.



Your Trusted Source.


Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

Chain and Rigging

Chain Hooks




Chain and Rigging

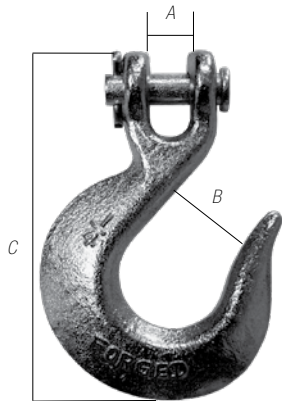

Clevis Slip Hooks

Forged carbon steel. Clear zinc plated finish.
For use with Grade 30 & Grade 40 chains.


PART#	CHAIN DIAMETER	PIN	A	B	C	W.L.L.	U.L.L.
66115	1/4"	3/8"	7/16"	15/16"	4"	1,950 lb	7,800 lb
66116	5/16"	7/16"	1/2"	1-1/16"	4-1/2"	2,875 lb	11,500 lb
66117	3/8"	1/2"	9/16"	1-5/16"	5-3/8"	4,000 lb	16,000 lb
66118	7/16"	9/16"	5/8"	1-9/16"	6"	5,000 lb	20,000 lb
66119	1/2"	5/8"	3/4"	1-11/16"	6-3/4"	6,500 lb	26,000 lb

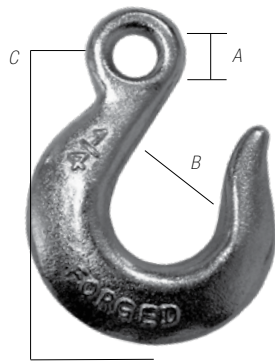

Eye Slip Hooks

Forged carbon steel. Clear zinc plated finish.
For use with Grade 30 & Grade 40 chains.

PART#	CHAIN DIAMETER	A	B	C	W.L.L.	U.L.L.
66129	1/4"	1/2"	15/16"	3-5/8"	1,950 lb	7,800 lb
66130	5/16"	5/8"	1-1/16"	4-3/16"	2,875 lb	11,500 lb
66131	3/8"	11/16"	1-5/16"	4-7/8"	4,000 lb	16,000 lb

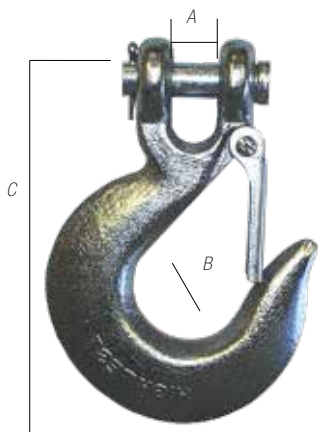

Carbon Clevis Slip Hooks With Latch

Forged carbon steel. Clear zinc plated finish.
For use with Grade 30 & Grade 40 chains.

PART#	CHAIN DIAMETER	PIN	A	B	C	W.L.L.	U.L.L.
66070	1/4"	3/8"	7/16"	15/16"	4"	1,950 lb	7,800 lb
66071	5/16"	3/8"	1/2"	1-1/16"	4-1/2"	2,875 lb	11,000 lb
66072	3/8"	7/16"	5/8"	1-5/8"	5-1/4"	4,000 lb	16,000 lb


Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Alloy Clevis Slip Hooks With Latch

Forged alloy steel. For use with Grade 70 chain.
Yellow zinc dichromate plated finish.


PART#	CHAIN DIAMETER	PIN	A	B	C	W.L.L.	U.L.L.
66073	1/4"	3/8"	7/16"	15/16"	4"	2,750 lb	11,000 lb
66074	5/16"	7/16"	1/2"	1-1/16"	4-1/2"	4,300 lb	17,200 lb
66075	3/8"	7/16"	5/8"	1-5/8"	5-3/16"	5,250 lb	21,000 lb
66076	1/2"	5/8"	3/4"	1-3/4"	6-6/8"	9,000 lb	36,000 lb



Clevis Grab Hooks

Forged carbon steel. Clear zinc plated finish.
For use with Grade 30 & Grade 40 chain.


PART#	CHAIN DIAMETER	PIN	A	B	C	W.L.L.	U.L.L.
66110	1/4"	3/8"	0.36"	13/32"	3-3/8"	2,600 lb	10,400 lb
66111	5/16"	7/16"	0.40"	7/16"	3-15/16"	3,900 lb	15,600 lb
66112	3/8"	1/2"	0.48"	1/2"	4-1/2"	5,400 lb	21,600 lb
66113	7/16"	9/16"	0.66"	9/16"	5"	7,200 lb	28,800 lb
66114	1/2"	5/8"	0.75"	5/8"	5-3/4"	9,200 lb	36,800 lb

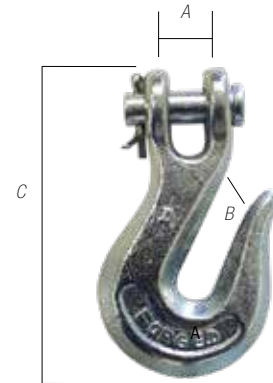

Alloy Clevis Grab Hooks

Forged alloy steel. For use with Grade 70 chain.
Yellow zinc dichromate plated finish.


PART#	CHAIN DIAMETER	PIN	A	B	C	W.L.L.	U.L.L.
66120	1/4"	3/8"	5/16"	13/32"	3-3/8"	3,600 lb	14,400 lb
66121	5/16"	7/16"	3/8"	7/16"	3-15/16"	5,400 lb	21,600 lb
66122	3/8"	15/32"	7/16"	1/2"	4-1/2"	7,500 lb	30,000 lb
66126	7/16"	9/16"	21/32"	9/16"	5"	10,000 lb	40,000 lb
66127	1/2"	5/8"	3/4"	21/32"	5-7/8"	12,750 lb	51,000 lb

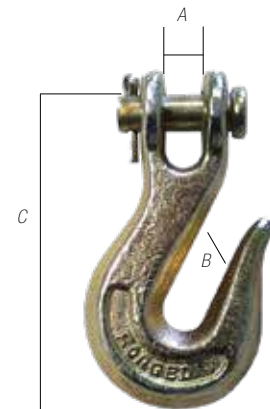

Eye Grab Hooks

Forged carbon steel. Clear zinc plated finish.
For use with Grade 30 chains.


PART#	CHAIN DIAMETER	A	B	C	W.L.L.	U.L.L.
66123	1/4"	1/2"	11/32"	3-1/16"	2,600 lb	10,400 lb
66124	5/16"	9/16"	7/16"	3-9/16"	3,900 lb	15,600 lb
66125	3/8"	13/16"	1/2"	4-1/4"	5,400 lb	21,600 lb



Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

Chain and Rigging


Chain Hooks



Alloy Clevis Hooks With Latch

Forged alloy steel. For use with Grade 70 chain. Yellow zinc dichromate plated finish.


PART#	CHAIN DIAMETER	A	B	C	W.L.L.	U.L.L.
66080	1/4"	3/8"	3/8"	1-15/16"	3,600 lb	14,400 lb
66081	5/16"	3/8"	7/16"	2-1/4"	5,400 lb	21,000 lb
66082	3/8"	1/2"	1/2"	2-5/8"	7,500 lb	30,000 lb
66083	1/2"	13/16"	11/16"	3-3/16"	12,750 lb	51,000 lb



Swivel Eye Hook

Forged carbon steel. Clear zinc plated finish. Not recommended for overhead lifting.


PART#	A	B	C	W.L.L.	U.L.L.
66134	1-1/4"	7/8"	5-9/16"	1,500 lb	7,500 lb



Safety Slip Hooks

Forged carbon steel. Clear zinc plated finish. Not recommended for overhead lifting.


PART#	CHAIN DIAMETER	A	B	C	W.L.L.	U.L.L.
66133	1/4"	1/2"	3/4"	3-5/8"	1,950 lb	7,800 lb
66135	5/16"	5/8"	13/16"	4-3/16"	2,875 lb	11,500 lb



Safety Winch Hook

Forged carbon steel. Clear zinc plated finish. Not recommended for overhead lifting.

PART#	CHAIN DIAMETER	A	B	C	W.L.L.	U.L.L.
66136	1/4"	3/4"	3/4"	3-5/8"	1,500 lb	7,500 lb



Eye Hoist Hooks - Carbon Steel (Orange)

Complete with latches. Enamel painted finish. 5:1 safety factor.

PART#	A	B	C	W.L.L. (TONS)	U.L.L. (TONS)	LATCH KIT
66145	3/4"	13/16"	4-5/16"	3/4	3-3/4	66151
66146	7/8"	1-1/32"	4-7/8"	1	5	66152
66147	1-1/8"	1-1/16"	5-5/8"	1-1/2	7-1/2	66153
66148	1-1/4"	1-7/32"	6-1/2"	2	10	66154
66149	1-1/2"	1-1/2"	8"	2-1/2	15	66155
66150	2"	1-7/8"	10-1/4"	5	25	66156


Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Eye Hoist Hooks - Alloy Steel (Yellow)


Complete with latches. Enamel painted finish. 5:1 safety factor.

PART#	A	B	C	D	W.L.L. (TONS)	LATCH KIT
67145	5/8"	15/16"	3-7/8"	2-3/4"	3/4	66151
67146	3/4"	1-1/32"	4-3/8"	3-3/16"	1	66152
67147	15/16"	1-1/8"	4-7/8"	3-11/16"	1-1/2	66153
67148	1-1/8"	1-7/32"	5-1/2"	4"	2	66154
67149	1-1/4"	1-3/8"	6-1/2"	4-11/16"	3	66155

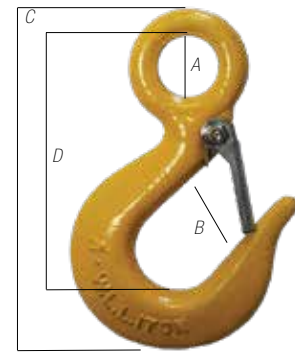


Master Links (Grade 80)

PART#	CHAIN DIAMETER	A	B	C	W.L.L.
67005	1/2"	2-1/2"	5"	6"	7,000 lb
67006	5/8"	3"	6"	7-1/4"	9,000 lb
67007	3/4"	2-3/4"		7"	10,500 lb
67008	1"	3-1/2"	7"	9"	24,350 lb




Connecting Links (Grade 80)

PART#	CHAIN DIAMETER	A	B	C	D	W.L.L.
67020	1/4"	3/8"	1-7/8"	1-3/4"	2-1/2"	1.5 T
67021	5/16"	25/64"	2-1/8"	2"	3"	2 T
67022	3/8"	17/32"	2-1/2"	2-1/2"	3-1/2"	3.2 T
67023	1/2"	5/8"	3-7/16"	3-7/32"	4-1/2"	5.4 T




Clevis Grab Hooks (Grade 80)

PART#	CHAIN DIAMETER	A	B	C	W.L.L.
67025	1/4"	3/8"	3/8"	3-11/16"	3,500 lb
67026	3/8"	1/2"	1/2"	5"	7,100 lb
67027	1/2"	5/8"	5/8"	5-13/16"	12,000 lb



Clevis Sling Hooks (Grade 80)

PART#	CHAIN DIAMETER	A	B	C	W.L.L.	LATCH KIT
67030	1/4"	3/8"	1-3/8"	5-5/16"	3,500 lb	67030-1
67031	3/8"	9/16"	1-11/16"	6-5/16"	6,940 lb	67031-1
67032	1/2"	5/8"	2"	7-5/8"	11,685 lb	67032-1




NEVER exceed Working Load Limits! Do not use less than Grade 80 fittings with any application!
Do not use chain or fittings showing signs of wear or deformities!

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**


Chain and Rigging

Hooks • Anchor Shackles



Self-Locking Clevis Hooks

PART#	CHAIN DIAMETER	A	B	W.L.L.	LATCH KIT
67040	9/32"	3-1/2"	6-1/4"	4,500 lb	67040-1
67041	3/8"	4-3/8"	7-1/2"	6,400 lb	67041-1
67042	1/2"	5-7/16"	9-1/2"	10,800 lb	67042-1




Swivel Eye Hoist Hooks

Design factor 4:1.

PART#	CHAIN DIAMETER	A	B	W.L.L.	LATCH KIT
67050	1/4"	2-3/4"	7"	3,500 lb	67040-1
67051	3/8"	4-3/8"	10-3/4"	7,100 lb	67041-1
67052	1/2"	5-3/8"	12-3/4"	12,000 lb	67042-1

Screw Pin Anchor Shackles


Heat treated alloy forged steel. Oversized alloy pin. Hot dipped galvanized finish. Meets Fed. Spec. RR-C-271D, Type 4A, Class 2, Design factor 6:1. Marked for Traceability: "D" marking for Dynaline.

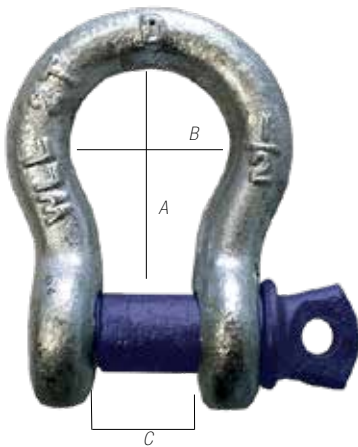

PART#	BODY DIAMETER	PIN DIAMETER	A	B	C	W.L.L. (TONS)
66000	1/4"	5/16"	1-1/8"	3/4"	1/2"	1/2
66001	5/16"	3/8"	1-1/4"	7/8"	1/2"	3/4
66002	3/8"	7/16"	1-7/16"	1"	5/8"	1
66003	7/16"	1/2"	1-11/16"	1-1/8"	3/4"	1-1/2
66004	1/2"	5/8"	1-7/8"	1-5/16"	3/4"	2
66005	5/8"	3/4"	2-3/8"	1-5/8"	1-1/16"	3-1/4
66006	3/4"	7/8"	2-3/4"	2"	1-1/4"	4-3/4
66007	7/8"	1"	3-5/16"	2-1/4"	1-7/16"	6-1/2
66008	1"	1-1/8"	3-3/4"	2-11/16"	1-11/16"	8-1/2
66059	1-1/8"	1-1/4"	4-1/4"	2-5/8"	1-3/4"	9-1/2
66060	1-1/4"	1-3/8"	4-11/16"	3"	2"	12
66061	1-3/8"	1-1/2"	5-1/4"	3-5/8"	2-1/4"	13-1/2
66062	1-1/2"	1-5/8"	5-3/4"	3-7/8"	2-3/8"	17

Commercial Grade Anchor Shackles

Oversized pin. C1010 Carbon Steel, galvanized. For general applications. Design factor 2:1. Not to be used for lifting.

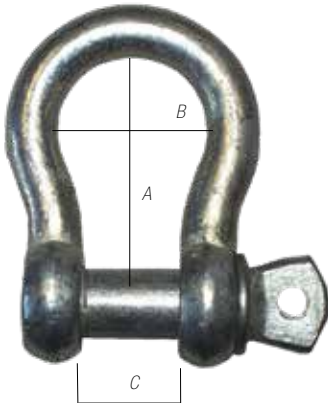

PART#	BODY DIAMETER	PIN DIAMETER	A	B	C	W.L.L.
66010	1/4"	5/16"	1-1/8"	3/4"	1/2"	600 lb
66011	5/16"	3/8"	1-7/32"	13/16"	17/32"	1/2 Ton
66012	3/8"	7/16"	1-7/16"	15/16"	1-7/16"	3/4 Tons
66013	1/2"	5/8"	1-7/8"	1-5/16"	13/16"	1-1/2 Tons
66014	5/8"	3/4"	2-3/8"	1-11/16"	1-1/16"	2-1/4 Tons
66017	7/16"	1/2"	1-11/16"	1-5/32"	11/16"	1-1/4 Tons

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**




Chain and Rigging



Stainless Steel Shackles

A151 316 Stainless steel.

PART#	BODY DIAMETER	PIN DIAMETER	A	B	C	W.L.L.
64060	3/16"	1/4"	7/8"	11/16"	3/8"	300 lb
64061	1/4"	5/16"	1-1/8"	3/4"	1/2"	450 lb
64062	5/16"	13/32"	1-3/16"	13/16"	19/32"	650 lb
64063	3/8"	1/2"	1-3/8"	1"	11/16"	1,000 lb



Screw Pin Chain Shackles

High-tensile forged steel. Oversized pin. Hot dipped galvanized finish. Meets Fed. Spec. RR-C-271D, Type 4B, Class 2. Design factor 6:1.


PART#	BODY DIAMETER	PIN DIAMETER	A	B	W.L.L. (TONS)
66020	1/4"	5/16"	7/8"	7/16"	1/2
66021	5/16"	3/8"	1"	9/16"	3/4
66022	3/8"	7/16"	1-1/4"	5/8"	1
66023	7/16"	1/2"	1-7/16"	11/16"	1-1/2
66024	1/2"	5/8"	1-5/8"	3/4"	2



Bolt Type Anchor Shackles

High-tensile forged steel. Oversized pin. Hot dipped galvanized finish. Meets Fed. Spec. RR-C-271D, Type 4A, Class 3. Design factor 6:1.


PART#	BODY DIAMETER	PIN DIAMETER	A	B	C	W.L.L. (TONS)
66900	1/4"	5/16"	1-1/8"	3/4"	1/2"	1/2
66901	5/16"	3/8"	1-1/4"	7/8"	1/2"	3/4
66902	3/8"	7/16"	1-7/16"	1"	5/8"	1
66903	7/16"	1/2"	1-11/16"	1-1/8"	3/4"	1-1/2
66904	1/2"	5/8"	1-7/8"	1-5/16"	3/4"	2
66905	5/8"	3/4"	2-3/8"	1-5/8"	1-1/16"	3-1/4
66906	3/4"	7/8"	2-3/4"	2"	1-1/4"	4-3/4
66907	7/8"	1"	3-5/16"	2-1/4"	1-7/16"	6-1/2
66908	1"	1-1/8"	3-3/4"	2-11/16"	1-11/16"	8-1/2
66959	1-1/8"	1-1/4"	4-1/4"	2-5/8"	1-3/4"	9-1/2
66960	1-1/4"	1-3/8"	4-11/16"	3"	2"	12



Mid Links

Forged carbon steel body. Alloy steel pins. Yellow zinc dichromate plated finish. For use with Grade 30, 40 & 70 chain.

PART#	CHAIN	PIN DIAMETER	A	B	C	D	W.L.L.	U.L.L.
66138	1/4"-5/16"	3/8"	7/16"	2-1/2"	1-5/8"	1-3/16"	4,700 lb	18,800 lb
66139	3/8"	7/16"	1/2"	2-13/16"	1-13/16"	1-3/8"	6,600 lb	26,400 lb
66140	7/16"-1/2"	9/16"	5/8"	3-5/8"	2-3/16"	1-3/4"	11,250 lb	45,000 lb



Notice: If pins are difficult to remove after 1/4 turn, it has likely been overloaded, and must be discarded and replaced.

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Chain and Rigging


Cold Shuts • Chain Swivels • Repair Links • Link Locks



Cold Shuts

Formed steel. Clear zinc plated finish.


PART#	WIRE	W.L.L.	PACKAGE QUANTITY
66440	3/16"	550 lb	10
66441	1/4"	750 lb	10
66442	5/16"	1,250 lb	5
66443	3/8"	1,900 lb	5
66444	7/16"	2,650 lb	5
66445	1/2"	3,500 lb	5

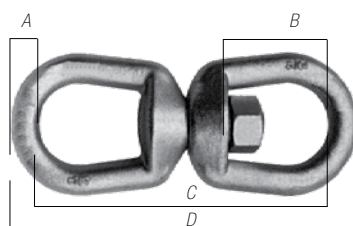

Forged Chain Swivel

Hot dipped, galvanized. Meets Fed. Spec. RR-C-271D-Type 7, Class 2. Not designed to swivel under load!


PART#	A	B	C	D	W.L.L.	U.L.L.
66165	1/4"	1-1/16"	3"	3-7/16"	850 lb	4,250 lb
66166	5/16"	1-1/4"	3-9/16"	4-1/8"	1,250 lb	6,250 lb
66167	3/8"	1-1/2"	4-5/16"	5-7/16"	2,250 lb	11,250 lb
66168	1/2"	2"	5-7/16"	6-7/16"	3,600 lb	18,000 lb



Repair Links

Mild steel. Clear zinc plated finish.

PART#	CHAIN	A	B	W.L.L.	U.L.L.	PACKAGE QUANTITY
66400	1/8"	3/4"	1/4"	150 lb	600 lb	10
66401	3/16"	1"	1/2"	200 lb	800 lb	10
66402	1/4"	1-1/4"	1/2"	400 lb	1,600 lb	10
66403	5/16"	1-1/2"	3/4"	700 lb	2,800 lb	5
66404	3/8"	1-5/8"	3/4"	1,500 lb	6,000 lb	5



Link Locks

PART#	CHAIN	A	B	W.L.L.	U.L.L.	PACKAGE QUANTITY
66413	1/4"	2-1/4"	5/8"	1,000 lb	3,700 lb	5
66414	5/16"	2-3/4"	3/4"	1,500 lb	6,000 lb	5
66415	3/8"	3-1/8"	3/4"	3,000 lb	12,000 lb	5

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**




Chain and Rigging



“Missing Link” Connecting Links

Forged steel, Grade 30.


PART#	CHAIN	A	B	C	W.L.L.	PACKAGE QUANTITY
66416	1/4"	9/32"	7/8"	1-1/2"	1,125 lb	5
66417	5/16"	11/32"	15/16"	1-11/16"	1,700 lb	5
66418	3/8"	13/32"	1-1/8"	2-1/16"	2,325 lb	5

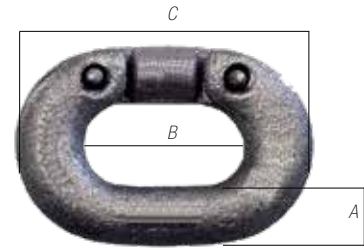

Quick Links - Zinc Plated

Zinc plated. Mild steel.

PART#	A	B	C	W.L.L.	U.L.L.	PACKAGE QUANTITY
66430	1/8"	3/16"	1-7/16"	220 lb	550 lb	10
66431	3/16"	1/4"	2"	660 lb	1,650 lb	10
66432	1/4"	9/32"	2-1/4"	880 lb	2,200 lb	10
66433	5/16"	11/32"	2-15/16"	1,760 lb	4,400 lb	5
66434	3/8"	7/16"	3-9/16"	2,200 lb	5,500 lb	5
66435	7/16"	1/2"	3-11/16"	2,640 lb	6,600 lb	5
66436	1/2"	9/16"	4-1/8"	3,300 lb	8,250 lb	5

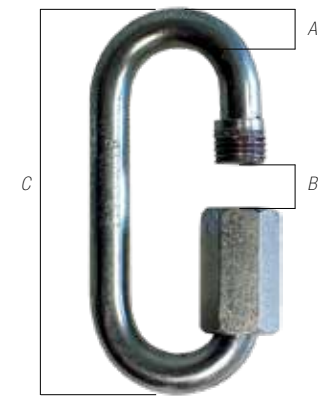

Quick Links - Stainless Steel

A151 316 Stainless Steel.


PART#	A	B	C	W.L.L.	PACKAGE QUANTITY
64000	1/8"	3/16"	1-7/16"	220 lb	5
64001	5/32"	7/32"	1-5/8"	400 lb	5
64002	1/4"	11/32"	2-9/32"	880 lb	5
64003	5/16"	3/8"	2-7/8"	1,600 lb	5
64004	3/8"	1/2"	3-1/2"	2,200 lb	5



Forged-D-Ring With Weld-On Bracket

Forged, hot dipped, galvanized. Comes with weld-on bracket.

PART#	WIRE DIAMETER	A	B	W.L.L.
66185	1/2"	2-1/4"	2-1/2"	12,000 lb
66186	5/8"	3"	3"	18,000 lb
66187	3/4"	3"	3"	26,500 lb
66188	1"	3"	4"	47,000 lb

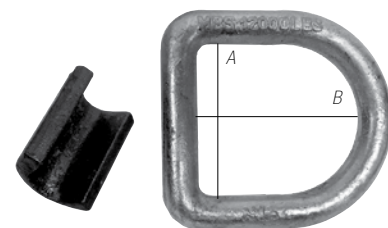

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

Chain and Rigging


Cable • Wire Rope



Aircraft Cable 7 X 7 Construction

Galvanized steel. Supplied on spools.


PART#	CABLE DIAMETER	BREAK STRENGTH	SPOOL LENGTH
77000	1/16"	480 lb	500'
77001	3/32"	920 lb	500'
77002	1/8"	1,700 lb	250'
77010	1/16"	480 lb	1,000'
77011	3/32"	920 lb	1,000'
77012	1/8"	1,700 lb	1,000'



Aircraft Cable 7 X 19 Construction

Galvanized steel. Supplied on spools.

PART#	CABLE DIAMETER	BREAK STRENGTH	SPOOL LENGTH
77003	5/32"	2,800 lb	250'
77004	3/16"	4,200 lb	250'
77005	1/4"	7,000 lb	250'
77006	5/16"	9,800 lb	250'
77007	3/8"	14,400 lb	250'
77013	5/32"	2,800 lb	1,000'
77014	3/16"	4,200 lb	1,000'
77015	1/4"	7,000 lb	1,000'
77016	5/16"	9,800 lb	1,000'
77017	3/8"	14,400 lb	1,000'



Wire Rope

Supplied in coils. Oily finish. Fibre core.


PART#	ROPE DIAMETER	BREAK STRENGTH	SPOOL LENGTH
77020	1/2"	22,000 lb	100'

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Chain and Rigging



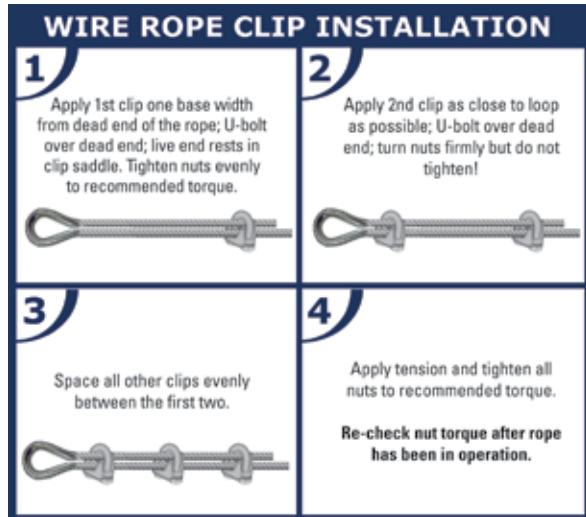

NOTE: Properly swagged cable sleeves are capable of maintaining over 90% of the breaking strength of the cable.

The maximum holding strength of cable stops are approximately 1/3 of the strength of the cable.

To determine the exact holding strength, a pull test must be performed prior to use.

Malleable Iron Wire Rope Clips

Galvanized iron saddles. Meets Fed. Spec. FF-C-450, Type 1, Class 2*, (except 1/8"). Complete with U-bolts and nuts.

PART#	CABLE	PACKAGE QUANTITY
77030	1/8"	10
77031	3/16"	10
77032	1/4"	10
77033	5/16"	10
77034	3/8"	5
77035	1/2"	5
77036	5/8"	1
77037	3/4"	1
77038	7/8"	1
77039	1"	1



Forged Steel Wire Rope Clips

Forged steel body. Zinc plated finish. Meets Fed. Spec. FF-C-450, Type 1, Class 1**. Complete with U-bolts and nuts.

PART#	CABLE	PACKAGE QUANTITY
77040	1/8"	5
77041	3/16"	5
77042	1/4"	5
77043	5/16"	5
77044	3/8"	5
77045	1/2"	5
77046	5/8"	1
77047	3/4"	1
77048	7/8"	1
77049	1"	1



Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

Chain and Rigging

Wire Rope Clips • Thimbles



Stainless Steel Wire Rope Clips

Metric thread. Stainless Steel Grade 304***.

PART#	CABLE	PACKAGE QUANTITY
64020	1/8"	5
64021	3/16"	5
64022	1/4"	5
64023	5/16"	5
64024	3/8"	5

* **Type 1** - Single grip, single saddle, with U-bolts and nuts (MS16842).
Class 2 - Assembled with separate hex headed bolts and nuts (MS51868).

** **Type 1** - Single grip, single saddle, with U-bolts and nuts (MS16842).
Class 1 - Steel saddle.

*** **Grade 304** - is the standard "18/8" stainless; it is the most versatile and most widely used stainless steel, available in a wider range of products, forms and finishes than any other. It has excellent forming and welding characteristics.

Cable Thimbles

Stainless Steel.



Wire Rope Clip



PART#	CABLE	PACKAGE QUANTITY
64040	1/8"	5
64041	3/16"	5
64042	1/4"	5
64043	5/16"	5
64044	3/8"	5

Standard Wire Rope Thimbles

Zinc plated steel. Meets Fed. Spec. FF-T-276B, Type 2.



Wire Rope Clip



PART#	CABLE	PACKAGE QUANTITY	PART#	CABLE	PACKAGE QUANTITY
77050	1/8"	10	77054	3/8"	10
77051	3/16"	10	77055	1/2"	5
77052	1/4"	10	77056	5/8"	1
77053	5/16"	10			

Heavy Wire Rope Thimbles

Hot dipped galvanized steel. Meets Fed. Spec. FF-T-276B, Type 3.



Wire Rope Clip



PART#	CABLE	PACKAGE QUANTITY	PART#	CABLE	PACKAGE QUANTITY
77060	1/4"	10	77065	3/4"	1
77061	5/16"	10	77066	7/8"	1
77062	3/8"	10	77067	1"	1
77063	1/2"	5	77068	1-1/8"	1
77064	5/8"	1			

Warning: Thimbles are not designed to support loads.

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**



Chain and Rigging



Cable Stops

Aluminum.

PART#	CABLE	LENGTH	PACKAGE QUANTITY	DYNAPAK	PACKAGE QUANTITY
77070	1/16"	3/16"	10	97070	10 x 77070
77071	3/32"	5/16"	10	97071	10 x 77071
77072	1/8"	5/16"	10	97072	10 x 77072
77073	5/32"	5/16"	10	97073	10 x 77073
77074	3/16"	3/8"	10	97074	10 x 77074
77075	1/4"	11/16"	5	97075	5 x 77075



Cable Sleeves

Aluminum.

PART#	CABLE	LENGTH	PACKAGE QUANTITY	DYNAPAK	PACKAGE QUANTITY
77080	1/16"	3/8"	10	97080	10 x 77080
77081	3/32"	1/2"	10	97081	10 x 77081
77082	1/8"	5/8"	10	97082	10 x 77082
77083	5/32"	9/16"	10	97083	10 x 77083
77084	3/16"	1"	10	97084	6 x 77084
77085	1/4"	1-1/8"	10	97085	5 x 77085
77086	5/16"	1-1/4"	10		
77087	3/8"	1-1/2"	10		



NOTE:

Properly swagged cable sleeves are capable of maintaining over 90% of the breaking strength of the cable.

The maximum holding strength of cable stops are approximately 1/3 of the strength of the cable.

To determine the exact holding strength, a pull test must be performed prior to use.


Dynaline offers merchandisers for almost every product. If you are ordering the products above then you may be interested in the following Merchandiser. For more information on this merchandiser see the Merchandising Section at the front of the catalogue.

Wire Rope Accessories Merchandiser 24" x 24"

PART#	CONTENTS
00567K	Full Wire Rope Accessories Merchandiser.

Wire Rope Accessories Merchandiser 12" x 24"

PART#	CONTENTS
00566K	Full Wire Rope Accessories Merchandiser.

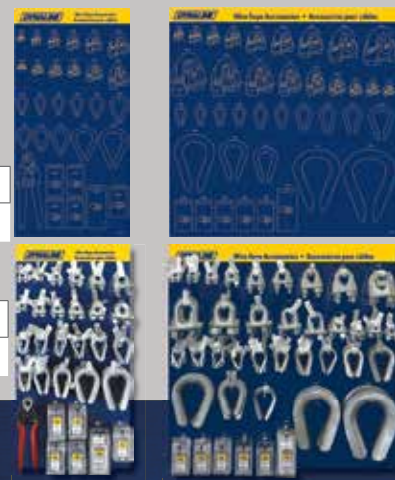

Your Trusted Source.

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

Chain and Rigging

Cable Cutters • Swagers • Chain Pliers • Tire Chain Hardware



Chain and Rigging



Cable Cutters

Aluminum drop-forged handles. Heat-treated blades (HRC 56-63). SK-5 cutter material.

PART#	REFERENCE#	CUTTING CAPACITY	OVERALL LENGTH
77107	C-7	Up to 5/32" Diameter Cable	7-1/2"
77116	C-16	Up to 5/8" Diameter Cable	23"



Bench Swager

For in-shop, one location jobs. Multi-compression jaws swager for 1/16", 3/32", 1/8", 5/32" & 3/16" oval/stop sleeves.

PART#	LENGTH	HEIGHT (OPEN)	WEIGHT
77101	22-1/2"	24"	3 kg



Hand Swager

For installing aluminum or copper sleeves & stops. Heat-treated alloy jaws.

PART#	CRIMPING CAPACITY	LENGTH
77100	1/16" to 3/16" Diameter	24"



Tire Chain Pliers

Opens & closes chain hardware easily. Alloy steel jaws. Steel handles with rubber hand grips.

PART#	OVERALL LENGTH	JAW OPENING
68100	32"	2"



Tire Chain Hardware

Made from C-1020 carbon steel.

PART#	DESCRIPTION	OVERALL LENGTH
68010	Boomer	7"
68011	Clevis & Thumbscrew	2"
68012	C-Hook	4"
68013	Boomer	6-1/2"
68014	C-Link	2-1/2"
68015	C-Hook	3-1/2"

Sizes are approximate. Specifications subject to change without notice. **Not Recommended for overhead lifting.**

