
QUICK GUIDE

E-LIFT TURNTABLE - TLA52828

BUILDPRO Welding Tables

TABLE OF CONTENTS:

1. Specifications
2. Maintenance
3. Safety
4. Limited Warranty

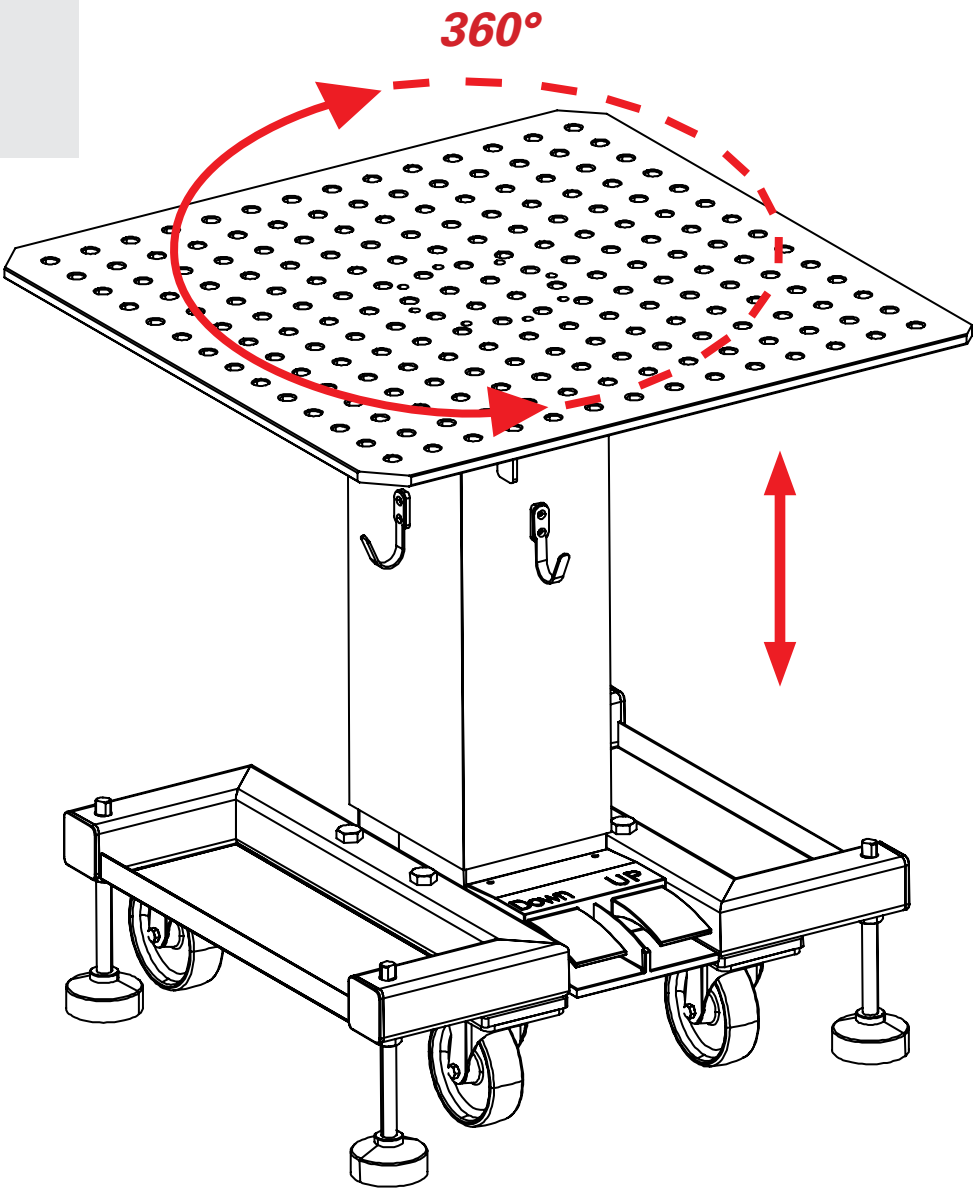

Tabletop Tilt Angle:
0° - 45°, Stop at any position

Tabletop Rotation Angle:
360° free rotation, Stop at every 10°


Voltage /Power:
AC110V 60Hz / 350W

SPECIFICATIONS

PN	Table Height	Tabletop Size	Tabletop Thickness	Hole Diameter	Grid Pattern	Load Capacity	Weight
TLA52828	31.5" - 45.3" 800 - 1,150 mm	30" x 30" 762 x 762 mm	0.47" 12 mm	0.625" 15.88 mm	2" x 2" 50.8 x 50.8 mm	250 lb 113 kg	405 lb 184 kg

QUICK GUIDE

E-LIFT TURNTABLE - TLA52828

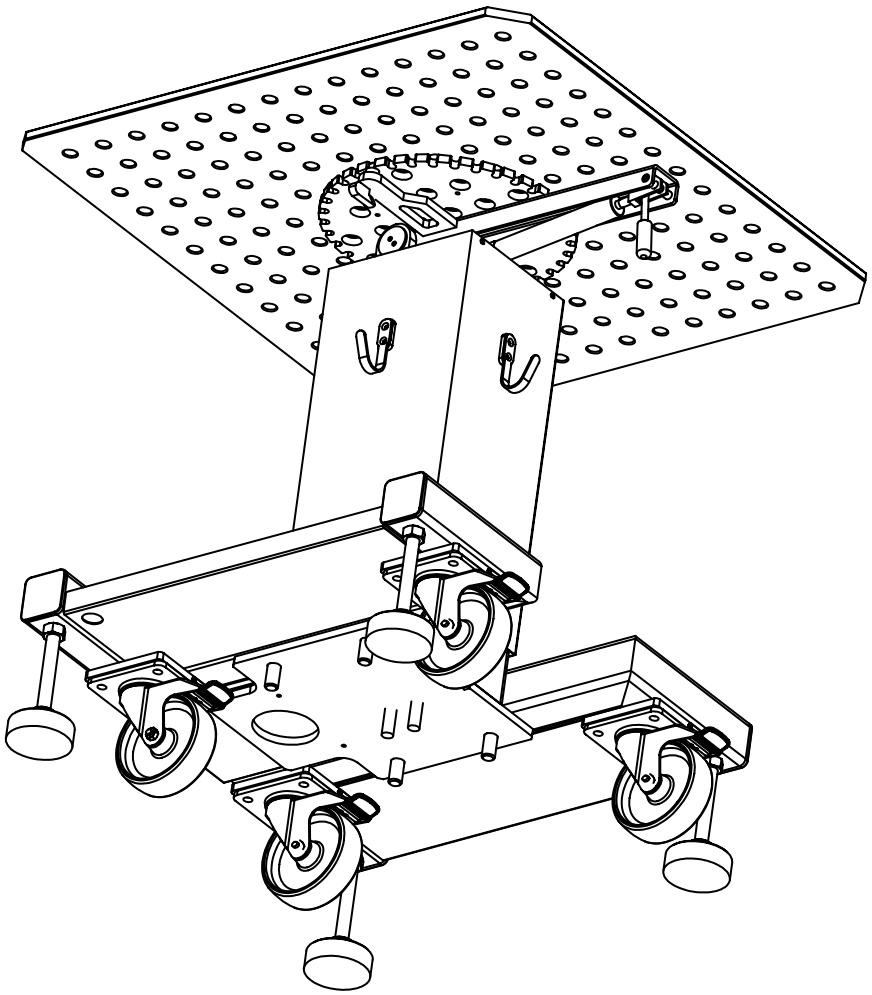

MAINTENANCE

- Do not place any heavy objects on the tabletop suddenly. Only load the tabletop while the platform is at its lowest height level. Do not load while the platform is in movement.
- Always clean the surface on the hydraulic cylinder and piston rod to prevent debris from entering the hydraulic cylinder and damaging the cylinder.
- Always clean the surface around the top and bottom rollers to keep the track clean.
- Regularly inspect all connecting parts, check for loose nuts and bolts, and tighten any hardware that may have come loose.
- If it is not used for an extended period of time, lower the tabletop to the lowest level to extend the service life of the lifting structure.
- It is recommended to release the foot pedal once the hi/low limit has been reached to avoid strain on the lifting mechanism.

SAFETY

ALWAYS wear safety goggles, gloves, and other appropriate safety items for protection. Use the cart only for its intended purpose.

LIMITED WARRANTY

Each STRONG HAND TOOL product is warranted to be free from defects in material and workmanship. Return to place of purchase for a replacement if warranty applies.